



FLOWave SAW flowmeter

- No obstacles inside the measuring tube, compact, lightweight and low energy consumption
- Conforms to hygienic requirements, CIP/SIP compatible
- Ideal for liquids with low or no conductivity
- Digital communication, parameterisation via Communicator, display and Wi-Fi
- Optional: ATEX/IECEX certification, II 3G/D

Product variants described in the data sheet may differ from the product presentation and description.

Can be combined with

	Type 8802 ELEMENT continuous control valve systems - overview	▶
	Type 8619 multiCELL - Multi-channel and multi-function transmitter/controller	▶
	Type 8647 AirLINE SP – electro-pneumatic automation system	▶
	Type ME43 Fieldbus gateway	▶

Type description

The Type 8098 flowmeter is part of the FLOWave product range. It is based on SAW (Surface Acoustic Waves) technology and is mainly designed for applications with the highest hygienic demands. This is achieved by using:

- suitable stainless steel materials
- a measuring tube free of any wetted parts except for the actual tube
- the ideal outer hygienic design.

FLOWave offers a range of integrated functions, including the advantages of flexibility, ease of cleaning, compact dimensions, lightweight, easy installation and handling, and is compliant with numerous standards.

Optimal measurement results can be achieved with homogeneous liquids, free of air and solid particles. For liquids with high viscosity, an integrated viscosity compensation can be activated. Gas and steam cannot be measured; however, their flow does not have any negative effect on the device or its operation and other liquids flowing through afterwards are measured correctly as before. Special functions derived from further process values (density factor, acoustic transmission factor) offer additional information about the particular liquid in use (for details, see chapter “7.2. Special functions” on page 27).

DTS 1000270652 EN Version: Q Status: RL (released | freigegeben | valide) printed: 28.02.2022



Table of contents

1. General technical data	4
1.1. About the FLOWave flowmeter	4
1.2. All versions	4
1.3. FLOWave L flowmeter	8
With or without industrial communication	8
With industrial communication (Ethernet version)	10
1.4. FLOWave S flowmeter	11
2. Approvals	13
2.1. Certification	13
2.2. Certificates	13
2.3. Pressure Equipment Directive	14
Device used on a pipe	14
3. Materials	14
3.1. Chemical Resistance Chart – Bürkert resistApp	14
3.2. Material specifications	15
FLOWave L flowmeter without industrial communication	15
FLOWave L flowmeter with industrial communication	16
FLOWave S flowmeter	17
4. Dimensions	18
4.1. Transmitter of the FLOWave L flowmeter without industrial communication	18
4.2. Transmitter of the FLOWave L flowmeter with industrial communication	18
4.3. Transmitter of the FLOWave S flowmeter	18
4.4. Flowmeter with clamp process connection	19
4.5. Flowmeter with aseptic collar flange (BF)	21
4.6. Flowmeter with aseptic collar clamp (BKS)	22
4.7. Flowmeter with thread connection	23
5. Performance specifications	23
5.1. Medium temperature	23
5.2. Measurement deviation	24
6. Product installation	25
6.1. Installation notes	25
6.2. Selection of the nominal diameter	25
6.3. Mounting options	26
FLOWave L flowmeter	26
FLOWave S flowmeter	26
7. Product operation	27
7.1. Measuring principle	27
7.2. Special functions	27
8. Product design and assembly	28
8.1. Product assembly	28
9. Product accessories	29

10. Ordering information

29

10.1. Bürkert eShop – Easy ordering and quick delivery.....	29
10.2. Recommendation regarding product selection	29
10.3. Bürkert product filter.....	30
10.4. Bürkert 3D Model - Interactive Animation	30
10.5. Ordering chart FLOWave L flowmeter with or without industrial communication	31
Clamp process connection acc. to DIN 32676 series A for pipe acc. to DIN 11866 series A (DIN 11850).....	31
Clamp process connection acc. to DIN 32676 series B for pipe acc. to DIN 11866 series B (ISO 1127).....	32
Clamp process connection acc. to DIN 32676 series C for pipe acc. to DIN 11866 series C (ASME BPE)	33
Thread process connection acc. to DIN 11851 series A for pipe acc. to DIN 11866 series A (DIN 11850)	34
10.6. Ordering chart FLOWave S flowmeter	35
Clamp process connection acc. to DIN 32676 series A for pipe acc. to DIN 11866 series A (DIN 11850).....	35
Clamp process connection acc. to DIN 32676 series B for pipe acc. to DIN 11866 series B (ISO 1127).....	36
Clamp process connection acc. to DIN 32676 series C for pipe acc. to DIN 11866 series C (ASME BPE)	37
Thread process connection acc. to DIN 11851 series A for pipe acc. to DIN 11866 series A (DIN 11850)	38
10.7. Ordering chart accessories.....	39

1. General technical data

1.1. About the FLOWave flowmeter

The flowmeter Type 8098 consists of:

- either a flow sensor Type S097 and a transmitter Type SE98 (version FLOWave L flowmeter), which is available with or without industrial communication (the FLOWave L version with industrial communication, recognisable by the two M12 female connectors and the M12 male connector, is called the Ethernet version.)



- or a flow sensor Type S097 and a transmitter Type SE91 (version FLOWave S flowmeter)



1.2. All versions

The following data applies to all versions.

Product properties

Material

Please make sure the device materials are compatible with the fluid you are using.

Detailed information can be found in chapter [“3.1. Chemical Resistance Chart – Bürkert resistApp”](#) on page 14.

Detailed information on the materials can be found in chapter [“3.2. Material specifications”](#) on page 15.

Non wetted parts

- | | |
|----------------|---|
| Sensor housing | <ul style="list-style-type: none"> • For sensor with process connection \leq DN 50/2": stainless steel 304/1.4301 • For sensor with process connection $>$ DN 50/2": stainless steel 316L/1.4435 |
|----------------|---|

Wetted parts

Measurement tube and clamp	Stainless steel 316L/1.4435 with low delta ferrite content
----------------------------	--

Dimensions	Detailed information can be found in chapter “4. Dimensions” on page 18.
------------	--

Surface quality

- | | |
|---|--|
| Measurement tube (inner surface) | <ul style="list-style-type: none"> • Ra $<$ 0.8 μm (30 μin.) or • Ra $<$ 0.4 μm (15 μin.) (electro-polished) according to ISO 4288 |
| Measurement tube (outer surface), housing | Ra $<$ 1.6 μ m (excluding welding seams) according to ISO 4288 |

Measuring range

Volume flow rate measurement	0...1.7 m ³ /h up to 0...200 m ³ /h Detailed information can be found in chapter “10.5. Ordering chart FLOWave L flowmeter with or without industrial communication” on page 31 or “10.6. Ordering chart FLOWave S flowmeter” on page 35.
------------------------------	--

Temperature measurement	-20...+140 °C (-4...+284 °F)
-------------------------	------------------------------

Special function	<ul style="list-style-type: none"> • ATF: acoustic transmission factor • DF: density factor <p>Active by default, deselectable upon request. Detailed information can be found in chapter “7.2. Special functions” on page 27.</p>
------------------	--

Performance data

Volume flow rate measurement

Under reference conditions i.e. measuring fluid = water free from gas bubbles and solids, ambient and water temperature = 23 °C ± 1 °C (73.4 °F ± 1.8 F), and short refresh time, while maintaining turbulent or laminar flow profile, with the minimum inlet (40 x DN) and outlet (1 x DN) distances and the appropriate internal diameter of the pipes. Deviation from reference conditions can be adjusted through the use of a built-in correction K factor adjustment or Teach-in Procedure.

Measurement deviation	<ul style="list-style-type: none"> • From 10 % of full scale up to full scale: ± 0.4 % of the measured value • From 1 % of full scale up to 10 % of full scale: ± 0.08 % of full scale <p>Detailed information can be found in chapter “5.2. Measurement deviation” on page 24.</p>
Repeatability	<ul style="list-style-type: none"> • From 10 % of full scale up to full scale: ± 0.2 % of the measured value • From 1 % of full scale up to 10 % of full scale: ± 0.04 % of full scale
Refresh time	<p>Selectable:</p> <ul style="list-style-type: none"> • Very short (~ 30 ms) • Short (~ 55 ms) • Long (~ 100 ms)

Temperature measurement

Measurement deviation	<ul style="list-style-type: none"> • For $T^{\circ} \leq 100^{\circ} \text{C}$ (+212 °F): ± 1 °C (+ 1.8 °F) • For 100°C (+212 °F) < $T^{\circ} < 140^{\circ} \text{C}$ (+284 °F): ± 1.5 %
Refresh time	Approx. 0.1 s

Electrical data

Operating voltage	<ul style="list-style-type: none"> • 12...35 V DC filtered and regulated • Tolerance: ± 10 % • Connection to main supply: permanent (through external SELV (Safety Extra Low Voltage) and LPS (Limited Power Source) power supply)
Power source (not supplied)	Limited power source according to UL/EN 60950-1 standards or limited energy circuit according to UL/EN 61010-1 §9.4
DC reverse polarity protection	Yes

Voltage supply cable

For cable glands	<ul style="list-style-type: none"> • 0.2...1.5 mm² cross-section • In nickel plated brass: <ul style="list-style-type: none"> – Cable with maximum operating temperature greater than + 80 °C (+ 176 °F) – 5...14 mm diameter, shielded cable • In stainless steel: <ul style="list-style-type: none"> – Cable with maximum operating temperature greater than + 80 °C (+ 176 °F) – 6...12 mm diameter, shielded cable
For 5 pin M12 male connector (A-coded)	<ul style="list-style-type: none"> • Cable with maximum operating temperature greater than + 80 °C (+ 176 °F) • 3...6.5 mm diameter, shielded cable,
For 4 pin M12 female connector (D-coded)	<ul style="list-style-type: none"> • 0.75 mm² cross-section to connect to 5 pin M12 female connector (A-coded, not supplied) • Cable with maximum operating temperature greater than + 80 °C (+ 176 °F) • 5e / CAT-5 min. category, 100 m max. length, shielded conductor with minimum STP

Medium data

Fluid	<p>Non-dangerous liquids complying with article 4, §1 of 2014/68/EU directive. Detailed information can be found in chapter “2.3. Pressure Equipment Directive” on page 14.</p> <p>By default the FLOWave flowmeter is set for a fluid with a sound velocity¹⁾</p> <ul style="list-style-type: none"> • between 1000 m/s and 2000 m/s for process connection DN 08, 3/8" and 1/2" • between 800 m/s and 2300 m/s for process connection DN ≥ 15 or ≥ 3/4"
-------	--

Fluid temperature	<ul style="list-style-type: none"> -20...+110 °C (-4...+230 °F). The maximum fluid temperature can be restricted by the ambient operating temperature. Max. conditions for sterilisation process: up to +140 °C (+284 °F) (+130 °C (+266 °F) for ATEX/IECEx version) for max. 60 min Maximum temperature gradient: 10 °C/s (18 °F/s) (measured by the integrated sensor on the device)
-------------------	---

Fluid pressure (max.)

DN / Pipe standard	DIN 11850	ISO 1127	ASME BPE	SMS 3008
DN 08, 3/8", 1/2"	PN 25	PN 25	PN 25	–
DN 15, 3/4", DN 25, 1"	PN 25	PN 25	PN 25	PN 25
DN 40	PN 25	PN 16	–	PN 25
1 1/2", DN 50, 2"	PN 16	PN 16	PN 16	PN 16
DN 65, 2 1/2", DN 80, 3"	PN 10	PN 10	PN 10	–

Process/Port connection & communication**Process connection / pipe size²⁾ according to**

DIN 32676 series A / DIN 11850	Clamp: DN 08, DN 15, DN 25, DN 40, DN 50, DN 65 and DN 80
DIN 32676 series B / ISO 1127	Clamp: DN 08, DN 15, DN 25, DN 40, DN 50, DN 65 and DN 80
DIN 32676 series C / ASME BPE	Clamp: 3/8", 1/2", 3/4", 1", 1 1/2", 2", 2 1/2" and 3"
DIN 11864-2 form A series A / DIN 11850	Aseptic collar flange (BF) ³⁾ : DN 15, DN 25, DN 40 and DN 50
DIN 11864-2 form A series B / ISO 1127	Aseptic collar flange (BF) ³⁾ : DN 08, DN 15, DN 25, DN 40 and DN 50
DIN 11864-2 form A series C / ASME BPE	Aseptic collar flange (BF) ³⁾ : 1/2", 3/4", 1", 1 1/2" and 2"
DIN 11864-3 form A series A / DIN 11850	Aseptic collar clamp (BKS) ³⁾ : DN 15, DN 25, DN 40 and DN 50
DIN 11864-3 form A series B / ISO 1127	Aseptic collar clamp (BKS) ³⁾ : DN 08, DN 15, DN 25, DN 40 and DN 50
DIN 11864-3 form A series C / ASME BPE	Aseptic collar clamp (BKS) ³⁾ : 1/2", 3/4", 1", 1 1/2" and 2"
SMS 3017 / SMS 3008	Clamp: DN 25, DN 40 and DN 50
DIN 11851 series A / DIN 11850	Thread: DN 65 and DN 80

Device status	LED light ring according to NAMUR NE 107
---------------	--

Approvals and Certificates**Standards**

Degree of protection ⁴⁾	IP65, IP67 (according to IEC/EN 60529), NEMA 4X (according to NEMA250), if the product is wired and if the cable glands are tightened and the covers are screwed tight. Unused cable glands must be sealed with the stopper gaskets provided (mounted upon delivery of the product). An unused M12 fixed connector must be protected by the screwed plug.
------------------------------------	---

Directives

CE directives	The applied standards, which verify conformity with the EU Directives, can be found on the EU Type Examination Certificate and/or the EU Declaration of conformity (if applicable).
Pressure equipment directives	Complying with Article 4, Paragraph 1 of 2014/68/EU directive Detailed information on the pressure equipment directive can be found in chapter "2.3. Pressure Equipment Directive" on page 14.

Certificate	<ul style="list-style-type: none"> • FDA declaration of conformity • Inspection certificate 3.1 • Certification of compliance ASME BPE • Calibration certificate • On request: <ul style="list-style-type: none"> – USP class VI declaration – ECR1935/2004 declaration – CRN 0C21751 declaration^{5.)} – Test report 2.2 – Certification of conformity for the surface quality DIN 4762, EN ISO 4287, EN ISO 4288 – Certification of conformity for passivation and electro-polishing processes – MTBF (Mean Time Between Failures) manufacturer declaration
Certification	<ul style="list-style-type: none"> • EHEDG (Type EL CLASS I)^{6.)} • 3A (28-06)^{7.)} • On request: <ul style="list-style-type: none"> – UL-Listed for USA and Canada – ATEX/IECEX^{7.)}

Environment and installation

Ambient temperature

Depends on the fluid temperature. Detailed information can be found in chapter **“5.1. Medium temperature”** on page 23.

Storage	-20...+70 °C (-4...+158 °F)
Relative air humidity	≤ 85 %, without condensation
Height above sea level	Max. 2000 m
Operating conditions	Continuous
Equipment mobility	Fixed device
Application range	Indoor and outdoor (protect the device against electromagnetic interference, ultraviolet rays and, when installed outdoors, against the effects of climatic conditions)
Installation category	Category I according to UL/EN 61010-1
Pollution degree	Degree 2 according to UL/EN 61010-1

1.) Customer specific setting on request. Please contact your Bürkert partners!

2.) Please refer to the dimension table of the sensor, see chapters **“4.4. Flowmeter with clamp process connection”** on page 19, **“4.5. Flowmeter with aseptic collar flange (BF)”** on page 21, **“4.6. Flowmeter with aseptic collar clamp (BKS)”** on page 22, and **“4.7. Flowmeter with thread connection”** on page 23.

3.) In German: BF = Bundflansch, BKS= Bundklemmstutzen

4.) Not evaluated by UL, only IP64 is evaluated by the ATEX/IECEX notified/certification body.

5.) Only for a flowmeter with a process connection size of ¾"...2", pending for the other dimensions

6.) The EHEDG compliance for :

- clamp connection according to DIN 32676 is only valid if used in combination with EHEDG-compliant gaskets from Combifit International B.V.
- threaded connection according to DIN 11851 is only valid if used in combination with EHEDG-compliant gaskets from
 1. Kieselmann GmbH, Germany (ASEPTO-STAR k-flex upgrade gaskets) or
 2. Siersema Componenten Service (S.K.S.) B.V. (Netherlands SKS gasket set DIN 11851 EHEDG with EPDM or FKM inner gasket)

7.) Only for a flowmeter FLOWave L with a process connection size of DN 08...DN 50 or ¾"...2", pending for the other dimensions and for the FLOWave S

1.3. FLOWave L flowmeter

The FLOWave L flowmeter is available in four variants of the transmitter:

- Stainless steel transmitter with nickel plated brass cable glands and M12 male connector
- Stainless steel transmitter with stainless steel cable glands and M12 male connector (full stainless steel version)
- Stainless steel transmitter with stainless steel M12 female and male connectors and industrial communication (Ethernet version)
- Stainless steel transmitter with stainless steel cable glands and M12 male connector (ATEX/IECEX version).



With or without industrial communication

The following data applies to all versions (unless specified differently).

Product properties

Material

Detailed information on the materials can be found in chapter [“3.2. Material specifications”](#) on page 15.

Non wetted parts

Transmitter housing, blind cover	Stainless steel 304/1.4301
Display	Float glass, stainless steel 304/1.4301 and EPDM (ethylene propylene diene monomer) seal
Seal	VMQ silicone (Methyl Vinyl Silicone)
Cable glands	<ul style="list-style-type: none"> • Body in nickel plated brass and seal in TPE (thermoplastic elastomer) or • Body in stainless steel 304L/1.4307 and seal in TPE (FDA-compliant) or • Body in stainless steel 316L/1.4404 and seal in EPDM
Blind plugs	Black POM (polyoxymethylene), PA6 or PA
4 pin M12 female connector and screwed plug	Body in stainless steel 304L/1.4307, contact support in PBT GF30 (Polybutyleneterephthalate 30 % glass fibre reinforced) and seal in EPDM
5 pin M12 male connector and screwed plug	<ul style="list-style-type: none"> • Body in nickel plated brass and seal in NBR (nitrile butadiene rubber) or • Body in stainless steel 316L/1.4404 and seal in NBR or VMQ silicone
Functional earth element	Cylinder screw, washer, washer spring in stainless steel A4 and blind rivet nut in stainless steel 1.4578/A4
Pressure compensating element	Diaphragm in ePTFE (expanded polytetrafluoroethylene), O-ring in silicone 60 Shore A, body in stainless steel
Display module	2.4", monochrome graphic (240 × 160 pixels) German, English, French languages
Wi-Fi module (approved for Europe, USA and Canada)	<ul style="list-style-type: none"> • Can be used with or without display module • Wi-Fi module (wireless standard 802.11b/g/n) with integrated web server, offers the same setting options as the display. • Transmission power: approx. 50 mW • Radio range limited to approx. 10 m • Integration into existing Wi-Fi infrastructure possible

Requirements:

- Windows 7, 8.1 or 10: IE11, Edge, Google Chrome, from version 53
- Android: Google Chrome, from version 53
- Apple: Safari, from iOS 9.3.5

Weight (approx. in kg)	DN 08, 3/8", 1/2"	DN 15, 3/4"	DN 25, 1"	DN 40, 1 1/2"	DN 50, 2"	DN 65, 2 1/2"	DN 80, 3"
Clamp	2.1	2	2.2	3	3.2	5.4	5.5
Flange	2.3	2.4	2.7	3.6	3.8	–	–
Thread (dairy thread)	–	–	–	–	–	5.7	6.1
Performance data							
Frequency resolution	0.05 Hz over 0...2000 Hz range						
4...20 mA output uncertainty	±0.04 mA						
4...20 mA output resolution	0.8 µA						
Electrical data							
Power consumption	Without any consumption of output <ul style="list-style-type: none"> For device with 2 x M20 x 1.5 cable glands and 1 x 5 pin M12 connector: max. 5 W For device with 2 x 4 pin M12 connectors and 1 x 5 pin M12 connector, Ethernet version: max. 8 W For device with 2 x 4 pin M12 connectors and 1 x 5 pin M12 connector, Ethernet version, with display and Wi-Fi module: max. 9 W 						
Outputs	Valid for non-Ethernet versions only						
3 (1 digital, 1 analogue and 1 configurable):	digital or analogue)						
Digital outputs	Overload information (through software diagnostics function) Transistor: <ul style="list-style-type: none"> Type: NPN or PNP (wiring dependent), open collector, galvanically isolated Operating modes: pulse (by default), On/Off, threshold, frequency (user configurable) 0...2 kHz, 5...35 V DC, max. 700 mA, max. pulse duration: 2 s, selectable limits: 0.0001...10000 pulses/litre or 0.0001...9999.99 litres/pulse Protected against polarity reversals of DC and overloads 						
Analogue output	Open loop detection (through software diagnostics function) Current: <ul style="list-style-type: none"> 4...20 mA 3.6 mA or 22 mA to indicate an error (only if 4...20 mA scale selected); galvanically isolated Max. loop impedance: 1300 Ω at 35 V DC, 1000 Ω at 30 V DC, 700 Ω at 24 V DC, 450 Ω at 18 V DC 						
Process/Port connection & communication							
Electrical connection	2 x M20 x 1.5 cable glands and 1 x 5 pin M12 male fixed connector (A-coded) for non-Ethernet versions only						
Data transfer	External communication through bÜS (Bürkert system bus, CANopen protocol)						
Environment and installation							
Ambient temperature	Depends on the fluid temperature. Detailed information can be found in chapter "5.1. Medium temperature" on page 23.						
Operation	<ul style="list-style-type: none"> For device with 2 x M20 x 1.5 cable glands and 1 x 5 pin M12 connector: <ul style="list-style-type: none"> - 10...+70 °C (+14...+158 °F) or -10...+40 °C (+14...+104 °F) for ATEX/IECEX version, if -20 °C (4 °F) ≤ fluid temperature ≤ 80 °C (176 °F), At a fluid temperature >80 °C (176 °F), the maximum ambient temperature decreases linearly from 70 °C (158 °F) up to 40 °C (104 °F) or from 40 °C (104 °F) up to 30 °C (86 °F) for ATEX/IECEX version. This means that at a fluid temperature of 80 °C (176 °F) the ambient temperature may be a maximum of 70 °C and at a fluid temperature of 140 °C (130 °C for the ATEX/IECEX version) the ambient temperature may only be a maximum of 40 °C (30 °C for the ATEX/IECEX version). For device with 2 x 4 pin M12 female connectors and 1 x 5 pin M12 connector, Ethernet version: -10...+55 °C (+14...+131 °F) 						

With industrial communication (Ethernet version)**Process/Port connection & communication**

Electrical connection	2 × 4 pin M12 female fixed connectors (D-coded) and 1 × 5 pin M12 male fixed connector (A-coded)
-----------------------	--

Industrial Communication

Supported network protocols	<ul style="list-style-type: none"> • Modbus TCP • PROFINET • EtherNet/IP • EtherCAT
LEDs	<ul style="list-style-type: none"> • 2 Link/Act LEDs (green) • 2 Link LEDs (yellow)

Modbus TCP protocol

Protocol	Internet protocol, version 4 (IPv4)
Network topology	<ul style="list-style-type: none"> • Tree • Star • Line (open daisy chain)
IP configuration	<ul style="list-style-type: none"> • Static IP address • Not supported: BOOTP (Bootstrap Protocol), DHCP (Dynamic Host Configuration)
Transmission speed	10 or 100 MBit/s

PROFINET protocol

PROFINET IO specification	V2.3
Network topology	<ul style="list-style-type: none"> • Tree • Star • Ring (closed daisy chain) • Line (open daisy chain)
Network management	<ul style="list-style-type: none"> • LLDP (Link Layer Discovery Protocol) • SNMP V1 (Simple Network Management Protocol) • MIB (Management Information Base)
IP configuration	<ul style="list-style-type: none"> • DCP (Discovery and Configuration Protocol) • Manual (Device naming and IP setting)
Transmission speed	100 MBit/s full duplex
Maximum supported conformance class	CC-B
Media Redundancy (for ring topology)	MRP client is supported
GSDml file	See Device Description Files Type 8098 ► on the website in the Software chapter.

EtherNet/IP protocol

Protocol	Internet protocol, version 4 (IPv4)
Network topology	<ul style="list-style-type: none"> • Tree • Star • Ring (closed daisy chain) • Line (open daisy chain) • Linear (open Daisy Chain)
IP configuration	<ul style="list-style-type: none"> • Static IP address • BOOTP (Bootstrap Protocol) • DHCP (Dynamic Host Configuration Protocol)
Transmission speed	10 or 100 MBit/s
Duplex modes	Half duplex, full duplex, auto-negotiation
MDI modes (Medium Dependant Interface)	Auto-MDIX
Predefined standard objects	Identity, Message Router, Assembly, Connection Manager, DLR, QoS, TCP/IP Interface, EtherNet Link object
EDS file	See Device Description Files Type 8098 ► on the website in the Software chapter.

EtherCAT protocol^{1.)}

Industrial Ethernet interface X1, X2	X1: EtherCAT IN, X2: EtherCAT OUT
Maximum number of cyclic input/output data	512 bytes in total
Maximum number of cyclic input data	1024 bytes
Maximum number of cyclic output data	1024 bytes
Acyclic communication (CoE)	<ul style="list-style-type: none"> • SDO • SDO master-slave • SDO slave-slave (depends on master capacity)
Type	Complex slave
Fieldbus Memory Management Units (FMMUs)	8
Sync Managers	4
Transmission speed	100 Mbit/s

Approvals and Certificates

Certification	<ul style="list-style-type: none"> • PROFINET • EtherNet/IP
---------------	---

1.) EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH.

1.4. FLOWave S flowmeter

The FLOWave S flowmeter is available in four variants of the transmitter:

- Stainless steel transmitter without output and with stainless steel 5 pin M12 connector
- Stainless steel transmitter with 2 configurable outputs (DO/AO) and stainless steel 8 pin M12 connector
- Stainless steel transmitter without output and with stainless steel 5 pin M12 connector (ATEX/IECEX version)
- Stainless steel transmitter with 2 configurable outputs (DO/AO) and stainless steel 8 pin M12 connector (ATEX/IECEX version)



Product properties

Material

Detailed information on the materials can be found in chapter **“3.2. Material specifications”** on page 15.

Non wetted parts

Transmitter housing, cover	Stainless steel 304/1.4301
Light guide	PC (Polycarbonate) and O-ring in EPDM (Ethylene Propylene Diene Monomer)
Seal between sensor and transmitter	VMQ silicone (Methyl Vinyl Silicone)
5- or 8-pin M12 male connector and screwed plug	Stainless steel 316L/1.4404 or 303/1.4305 and with seal in EPDM

Weight (approx. in kg)	DN 08, 3/8", 1/2"	DN 15, 3/4"	DN 25, 1"	DN 40, 1 1/2"	DN 50, 2"	DN 65, 2 1/2"	DN 80, 3"
Clamp	1.7	1.6	1.8	2.6	2.8	5.0	5.1
Flange	1.9	2.0	2.3	3.2	3.4	–	–
Thread (dairy thread)	–	–	–	–	–	5.3	5.7

Electrical data

Power consumption	<ul style="list-style-type: none"> • For device without output: max. 2.5 W • For device with 2 outputs (DO/AO): max. 5 W
-------------------	--

Outputs	
2, each configurable as digital or analogue output	Only for device with 8-pin M12 connector
Digital output	Overload information (through software diagnostics function) Transistor: <ul style="list-style-type: none"> Type: NPN or PNP (wiring dependent), open collector, galvanically isolated Operating modes: pulse (by default), On/Off, threshold, frequency (user configurable) 0...2 kHz, 5...35 V DC, max. 700 mA, max. pulse duration: 2 s, selectable limits: 0.0001...10000 pulses/litre or 0.0001...9999.99 litres/pulse Protected against polarity reversals of DC and overloads
Analogue output	Open loop detection (through software diagnostics function) Current: <ul style="list-style-type: none"> 4...20 mA 3.6 mA or 22 mA to indicate an error (only if 4...20 mA scale selected); galvanically isolated Max. loop impedance: 1300 Ω at 35 V DC, 1000 Ω at 30 V DC, 700 Ω at 24 V DC, 450 Ω at 18 V DC

Process/Port connection & communication	
Electrical connection	<ul style="list-style-type: none"> 1 × 5 pin M12 male fixed connector (A-coded) for device without output 1 × 8 pin M12 male fixed connector (A-coded) for device with 2 outputs
Data transfer	<ul style="list-style-type: none"> Device without output: external communication through bÜS (Bürkert system bus, CANopen protocol) Device with 2 outputs: bÜS connection only to the Bürkert Communicator for configuration and software update of the device. Due to the missing CAN shield the conventional bÜS/ CANopen communication is not recommended.

Environment and installation	
Ambient temperature	
Depends on the fluid temperature. Detailed information can be found in chapter “5.1. Medium temperature” on page 23.	
Operation	<ul style="list-style-type: none"> -10...+70 °C (+14...+158 °F) if -20 °C (4 °F) ≤ fluid temperature ≤ 80 °C (176 °F) or for ATEX/IECEX version, -10...+60 °C (+14...+140 °F) if -20 °C (4 °F) ≤ fluid temperature ≤ 100 °C (212 °F) At a fluid temperature >80 °C (176 °F), the maximum ambient temperature decreases linearly from 70 °C (158 °F) up to 40 °C (104 °F). This means that at a fluid temperature of 80 °C (176 °F) the ambient temperature may be a maximum of 70 °C (158 °F) and at a fluid temperature of 140 °C (284 °F) the ambient temperature may only be a maximum of 40 °C (104 °F). or for ATEX/IECEX version, at a fluid temperature > 100 °C (212 °F), the maximum ambient temperature decreases linearly from 60 °C (140 °F) up to 45 °C (136 °F). This means that at a fluid temperature of 100 °C (212 °F) the ambient temperature may be a maximum of 60 °C (140 °F) and at a fluid temperature of 130 °C (266 °F) the ambient temperature may only be a maximum of 45 °C (136 °F)

2. Approvals

Note:

- The certification/certificate listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available devices can be supplied with the certification/certificate below.

2.1. Certification

Certificate	Description				
	<p>EHEDG (Type EL - CLASS I) The EHEDG compliance is only valid</p> <ul style="list-style-type: none"> • if the flowmeter with clamp connection according to DIN 32676 is used in combination with gaskets from Combifit International B.V. • if the flowmeter with threaded connection according to DIN 11851 is used in combination with gaskets from <ul style="list-style-type: none"> – 1. Kieselmann GmbH, Germany (ASEPTO-STAR k-flex upgrade gaskets) or – 2. Siersema Componenten Service (S.K.S.) B.V. (Netherlands SKS gasket set DIN 11851 EHEDG with EPDM or FKM inner gasket) 				
	<p>3-A Sanitary Standards The Type 8098 meets sanitary standards for design and fabrication. Certificate authorization number: 1178</p>				
	<p>UL-Listed for USA and Canada Products are UL-listed products and comply also with the following standards:</p> <ul style="list-style-type: none"> • UL 61010-1 • CAN/CSA-C22.2 No.61010-1 <p>Certificate number: 2017-10-27-E237737</p>				
	<p>Explosion proof As Category 3 device suitable for zone 2/22 (optional)</p> <table border="1"> <thead> <tr> <th>FLOWave L flowmeter</th> <th>FLOWave S flowmeter</th> </tr> </thead> <tbody> <tr> <td> <p>ATEX</p> <ul style="list-style-type: none"> • II 3G Ex ec IIC T4 Gc • II 3D Ex tc IIIC T110 °C Dc or T130 °C Dc <p>IECEX</p> <ul style="list-style-type: none"> • Ex ec IIC T4 Gc • Ex tc IIIC T110 °C Dc or T130 °C Dc </td> <td> <p>ATEX</p> <ul style="list-style-type: none"> • II 3G Ex ec IIC T4 Gc • II 3D Ex tc IIIC T130 °C Dc <p>IECEX</p> <ul style="list-style-type: none"> • Ex ec IIC T4 Gc • Ex tc IIIC T130 °C Dc </td> </tr> </tbody> </table> <p>Measures to comply with ATEX/IECEX requirements: refer to the</p> <ul style="list-style-type: none"> • Supplement Type 8098 FLOWave L ATEX/IECEX Variant ▶ or • Supplement Type 8098 FLOWave S ATEX/IECEX Variant ▶ <p>under user manual. The Ex. certification is only valid if the Bürkert device is used as described in the supplement ATEX/IECEX. If unauthorized changes are made to the device, the Ex. certification becomes invalid.</p>	FLOWave L flowmeter	FLOWave S flowmeter	<p>ATEX</p> <ul style="list-style-type: none"> • II 3G Ex ec IIC T4 Gc • II 3D Ex tc IIIC T110 °C Dc or T130 °C Dc <p>IECEX</p> <ul style="list-style-type: none"> • Ex ec IIC T4 Gc • Ex tc IIIC T110 °C Dc or T130 °C Dc 	<p>ATEX</p> <ul style="list-style-type: none"> • II 3G Ex ec IIC T4 Gc • II 3D Ex tc IIIC T130 °C Dc <p>IECEX</p> <ul style="list-style-type: none"> • Ex ec IIC T4 Gc • Ex tc IIIC T130 °C Dc
FLOWave L flowmeter	FLOWave S flowmeter				
<p>ATEX</p> <ul style="list-style-type: none"> • II 3G Ex ec IIC T4 Gc • II 3D Ex tc IIIC T110 °C Dc or T130 °C Dc <p>IECEX</p> <ul style="list-style-type: none"> • Ex ec IIC T4 Gc • Ex tc IIIC T110 °C Dc or T130 °C Dc 	<p>ATEX</p> <ul style="list-style-type: none"> • II 3G Ex ec IIC T4 Gc • II 3D Ex tc IIIC T130 °C Dc <p>IECEX</p> <ul style="list-style-type: none"> • Ex ec IIC T4 Gc • Ex tc IIIC T130 °C Dc 				
	<p>PROFINET Certificate number: Z12446</p>				
	<p>EtherNet/IP Document number: 11839</p>				

2.2. Certificates

Certificate	Description
	<p>The devices comply in their composition with the Code of Federal Regulations published by the FDA (Food and Drug Administration, USA).</p>
	<p>EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH</p>

DTS 1000270652 EN Version: Q Status: RL (released | freigegeben | valide) printed: 28.02.2022

2.3. Pressure Equipment Directive

The device conforms to Article 4, Paragraph 1 of the Pressure Equipment Directive 2014/68/EU under the following conditions:

Device used on a pipe

Note:

- The data in the table is independent of the chemical compatibility of the material and the fluid.
- PS = maximum admissible pressure, DN = nominal diameter of the pipe

Type of fluid	Conditions
Fluid group 1, Article 4, Paragraph 1.c.i	$DN \leq 25$
Fluid group 2, Article 4, Paragraph 1.c.i	$DN \leq 32$ or $PS \cdot DN \leq 1000$
Fluid group 1, Article 4, Paragraph 1.c.ii	$DN \leq 25$ or $PS \cdot DN \leq 2000$
Fluid group 2, Article 4, Paragraph 1.c.ii	$DN \leq 200$ or $PS \leq 10$ or $PS \cdot DN \leq 5000$

3. Materials

3.1. Chemical Resistance Chart – Bürkert resistApp



Bürkert resistApp – Chemical Resistance Chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.


[Start Chemical Resistance Check](#)

3.2. Material specifications

FLOWave L flowmeter without industrial communication

Note:

The following picture describes a device with 2x M20 x 1.5 cable glands, 1 x 5 pin M12 male connector and clamp process connection.

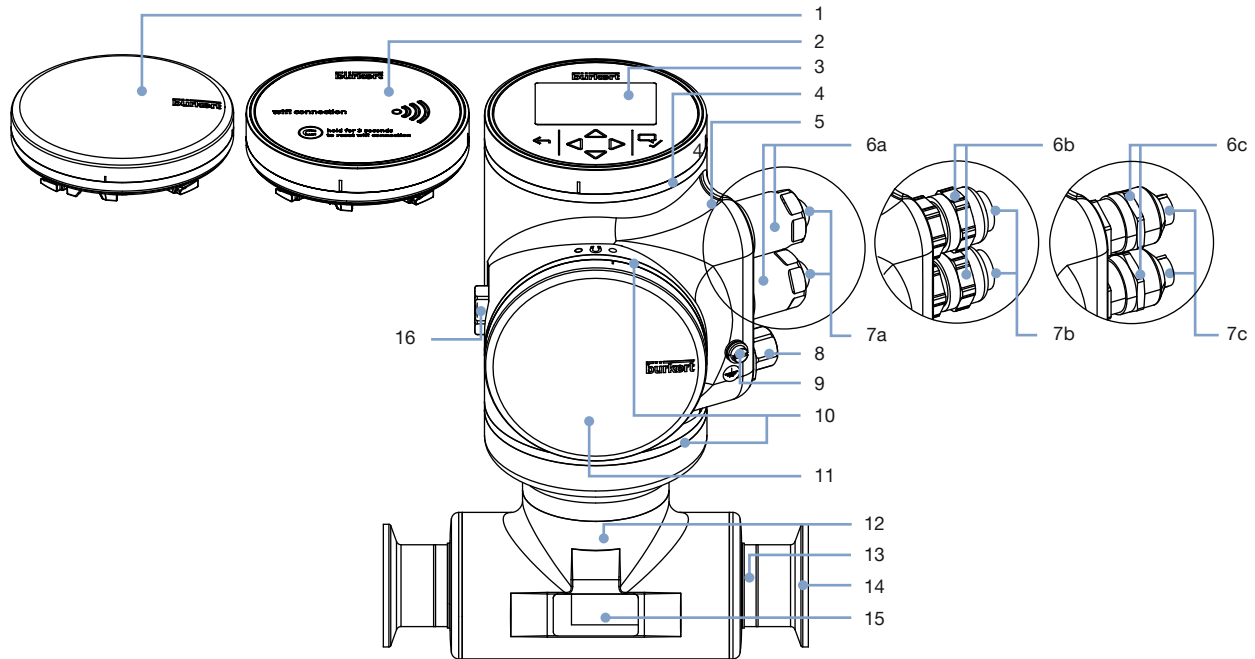


No.	Description	Material
1	Blind cover	Stainless steel 304/1.4301
2	Wi-Fi module	Float glass, stainless steel 304/1.4301
3	Display module	Float glass, stainless steel 304/1.4301
4	Multi-colour LED behind seal (used for e.g. to indicate the status of the product, based on the NAMUR NE 107 standard)	VMQ silicone
5	Transmitter housing	Stainless steel 304/1.4301
6a	Cable gland (full stainless steel version)	Body in stainless steel 304L/1.4307 and seal in TPE (according to FDA)
6b	Cable glands	Body in nickel plated brass and seal in TPE
6c	Cable glands (ATEX/IECEx version)	Body in stainless steel 316L/1.4404 and seal in EPDM
7a	Blind plug (full stainless steel version)	PA6
7b	Blind plug	Black POM
7c	Blind plug (ATEX/IECEx version)	PA
8	5 pin M12 male fixed connector (wired to bÜS) with screwed plug	<ul style="list-style-type: none"> Body in stainless steel 316L/1.4404 and seal in NBR (if equipped with 6a) or in VMQ silicone (if equipped with 6c) or Body in nickel plated brass and seal in NBR (if equipped with 6b)
9	Functional earth	Cylinder screw, washer, washer spring in stainless steel A4 and blind rivet nut in stainless steel 1.4578/A4
10	Seal	VMQ silicone
11	Blind cover	Stainless steel 304/1.4301
12	Sensor housing	For sensor with process connection: <ul style="list-style-type: none"> ≤ DN 50/2": stainless steel 304/1.4301 > DN 50/2": stainless steel 316L/1.4435
13	Sensor measurement tube	Stainless steel 316L/1.4435 with low delta ferrite content
14	Process connection (either clamp connections or flange connections)	Stainless steel 316L/1.4435 with low delta ferrite content
15	Pressure compensating element	Diaphragm in ePTFE, O-ring in silicone 60 Shore A and body in stainless steel (316L/1.4404)

FLOWave L flowmeter with industrial communication

Note:

The following picture describes a device (Ethernet version) with 2 × 4 pin M12 female connectors, 1 × 5 pin M12 male connector and flange process connection.

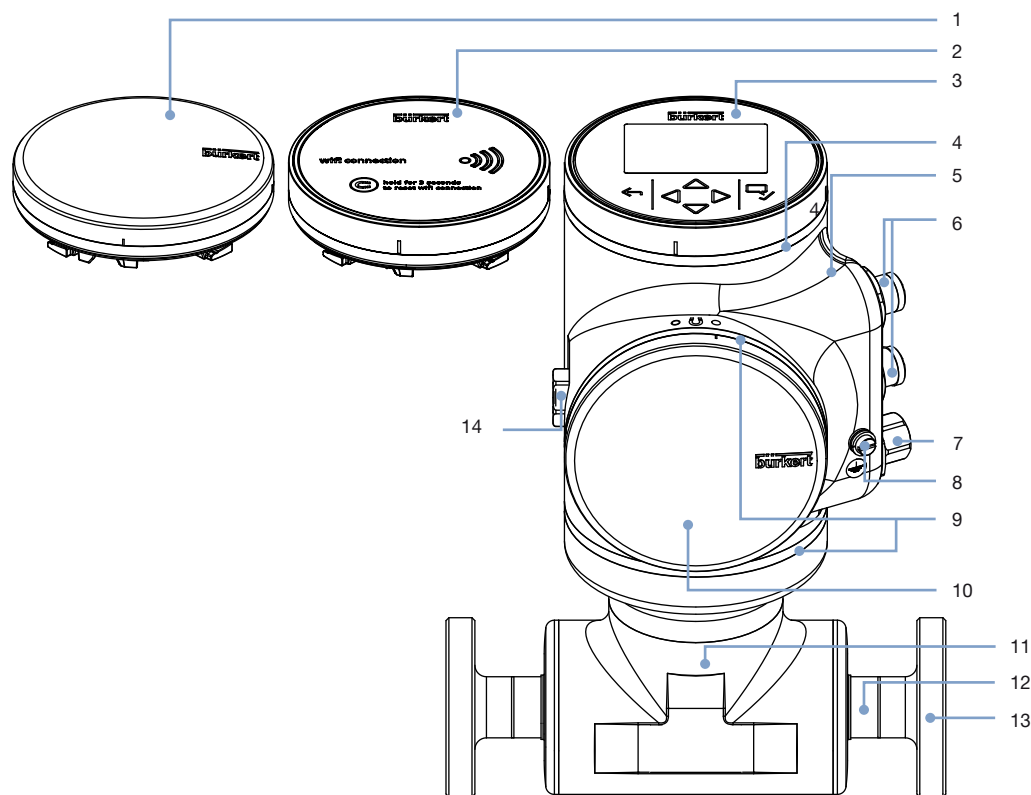


No.	Description	Material
1	Blind cover or	Stainless steel 304/1.4301
2	Wi-Fi module	Float glass, stainless steel 304/1.4301
3	Display module	Float glass, stainless steel 304/1.4301
4	Multi-colour LED behind seal (used for e.g. to indicate the status of the product, based on the NAMUR NE 107 standard)	VMQ silicone
5	Transmitter housing	Stainless steel 304/1.4301
6	4 pin M12 female fixed connectors with screwed plug	Body in stainless steel 304L/1.4307, contact support in PBT GF30 and seal in EPDM
7	5 pin M12 male fixed connector (wired to bus) with screwed plug	Body in stainless steel 316L/1.4404 and seal in NBR
8	Functional earth	Cylinder screw, washer, washer spring: stainless steel A4 blind rivet nut: stainless steel 1.4578/A4
9	Blind cover	VMQ silicone
10	Seal	Stainless steel 304/1.4301
11	Sensor housing	Stainless steel 304/1.4301 ^{1.)}
12	Sensor measurement tube	Stainless steel 316L/1.4435 with low delta ferrite content
13	Process connection (either clamp connections or flange connections)	Stainless steel 316L/1.4435 with low delta ferrite content
14	Pressure compensating element	Diaphragm: ePTFE; support: polyester; O-ring: silicone 60 Shore A; body: stainless steel (316L/1.4404)

1.) If instead of flange connections there are clamp connections according to DIN 32676 or threaded connections according to DIN 11851, the material of the sensor housing for DN > 50 is stainless steel 316L/1.4435.

FLOWave S flowmeter**Note:**

The following picture shows a device with 1 × 5 pin M12 male connector and clamp process connection.

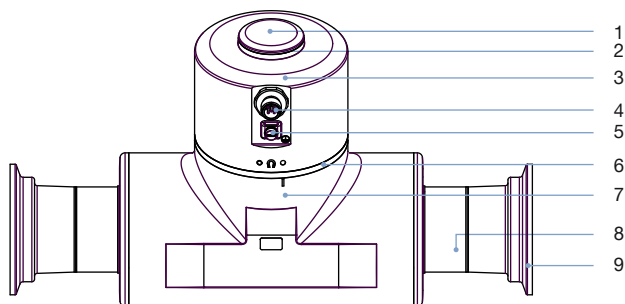

No.	Description	Material
1	Cover	Stainless steel 304/1.4301
2	Light guide for status display behind seal (used for e.g. indicating the status of the product, based on the NAMUR NE 107 standard)	PC and O-ring in EPDM
3	Transmitter housing	Stainless steel 304/1.4301
4	5 pin M12 male fixed connector (wired to bÜS) with screwed plug or 8 pin M12 male fixed connector (wired to bÜS as service interface ^{1.)} and 2 x DO/AO) (with screwed plug)	Stainless steel 316L/1.4404 or 303/1.4305 and seal in EPDM
5	Functional earth	Cylinder screw, washer, washer spring: stainless steel A4 blind rivet nut: stainless steel 1.4578/A4
6	Seal	VMQ silicone
7	Sensor housing	For sensor with process connection: <ul style="list-style-type: none"> • ≤ DN 50/2": stainless steel 304/1.4301 • > DN 50/2": stainless steel 316L/1.4435
8	Sensor measurement tube	Stainless steel 316L/1.4435 with low delta ferrite content
9	Process connection (either clamp connections or flange connections)	Stainless steel 316L/1.4435 with low delta ferrite content


1.) bÜS connection only to the Bürkert communicator for configuration and software update of the device. Due to the missing CAN shield the conventional bÜS/ CANopen communication is not recommended.

4. Dimensions

4.1. Transmitter of the FLOWave L flowmeter without industrial communication

Note:


Specifications in mm

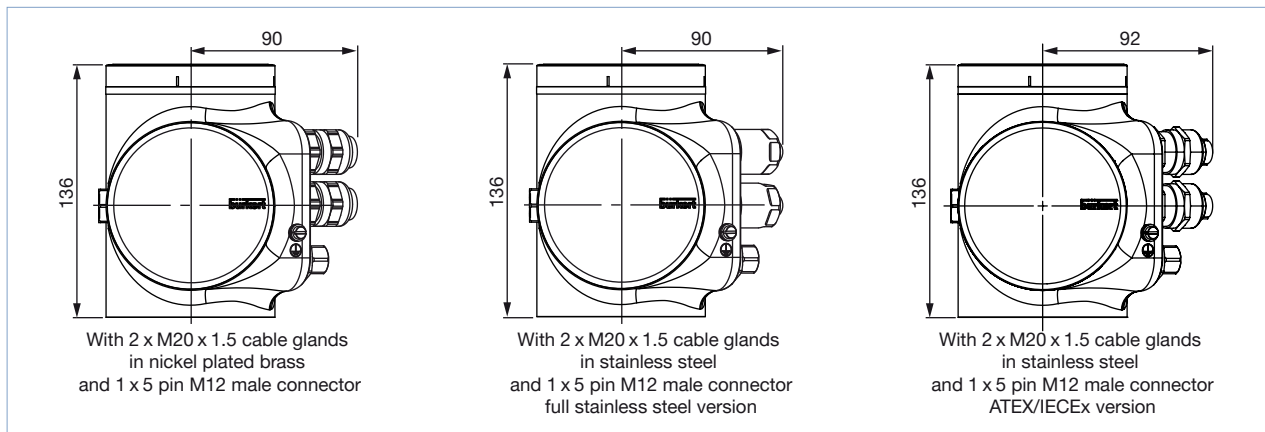

4.2. Transmitter of the FLOWave L flowmeter with industrial communication

Note:


Specifications in mm

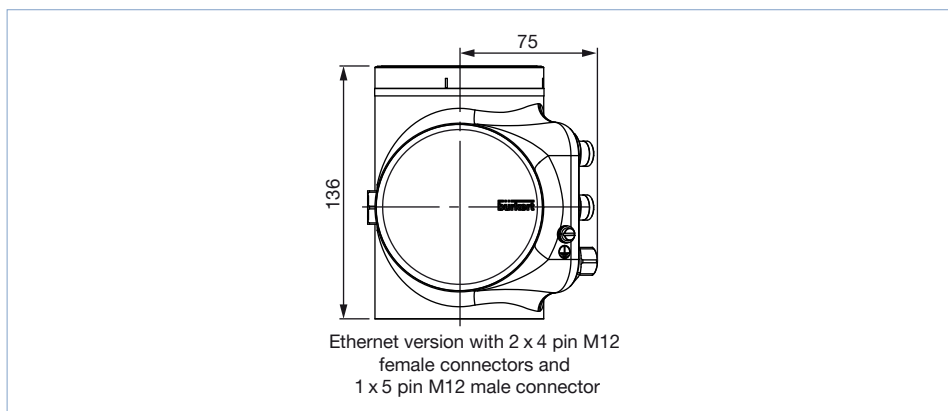

4.3. Transmitter of the FLOWave S flowmeter

Note:


Specifications in mm

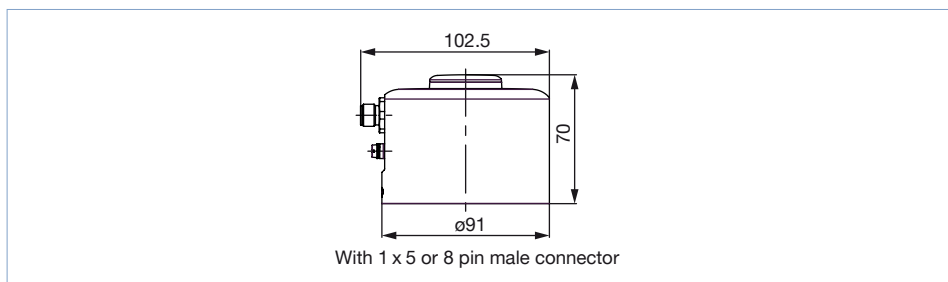

4.4. Flowmeter with clamp process connection

Note:

- Specifications in mm (unless specified differently)
- Clamp according to DIN 32676 series A, B or C, or SMS 3017

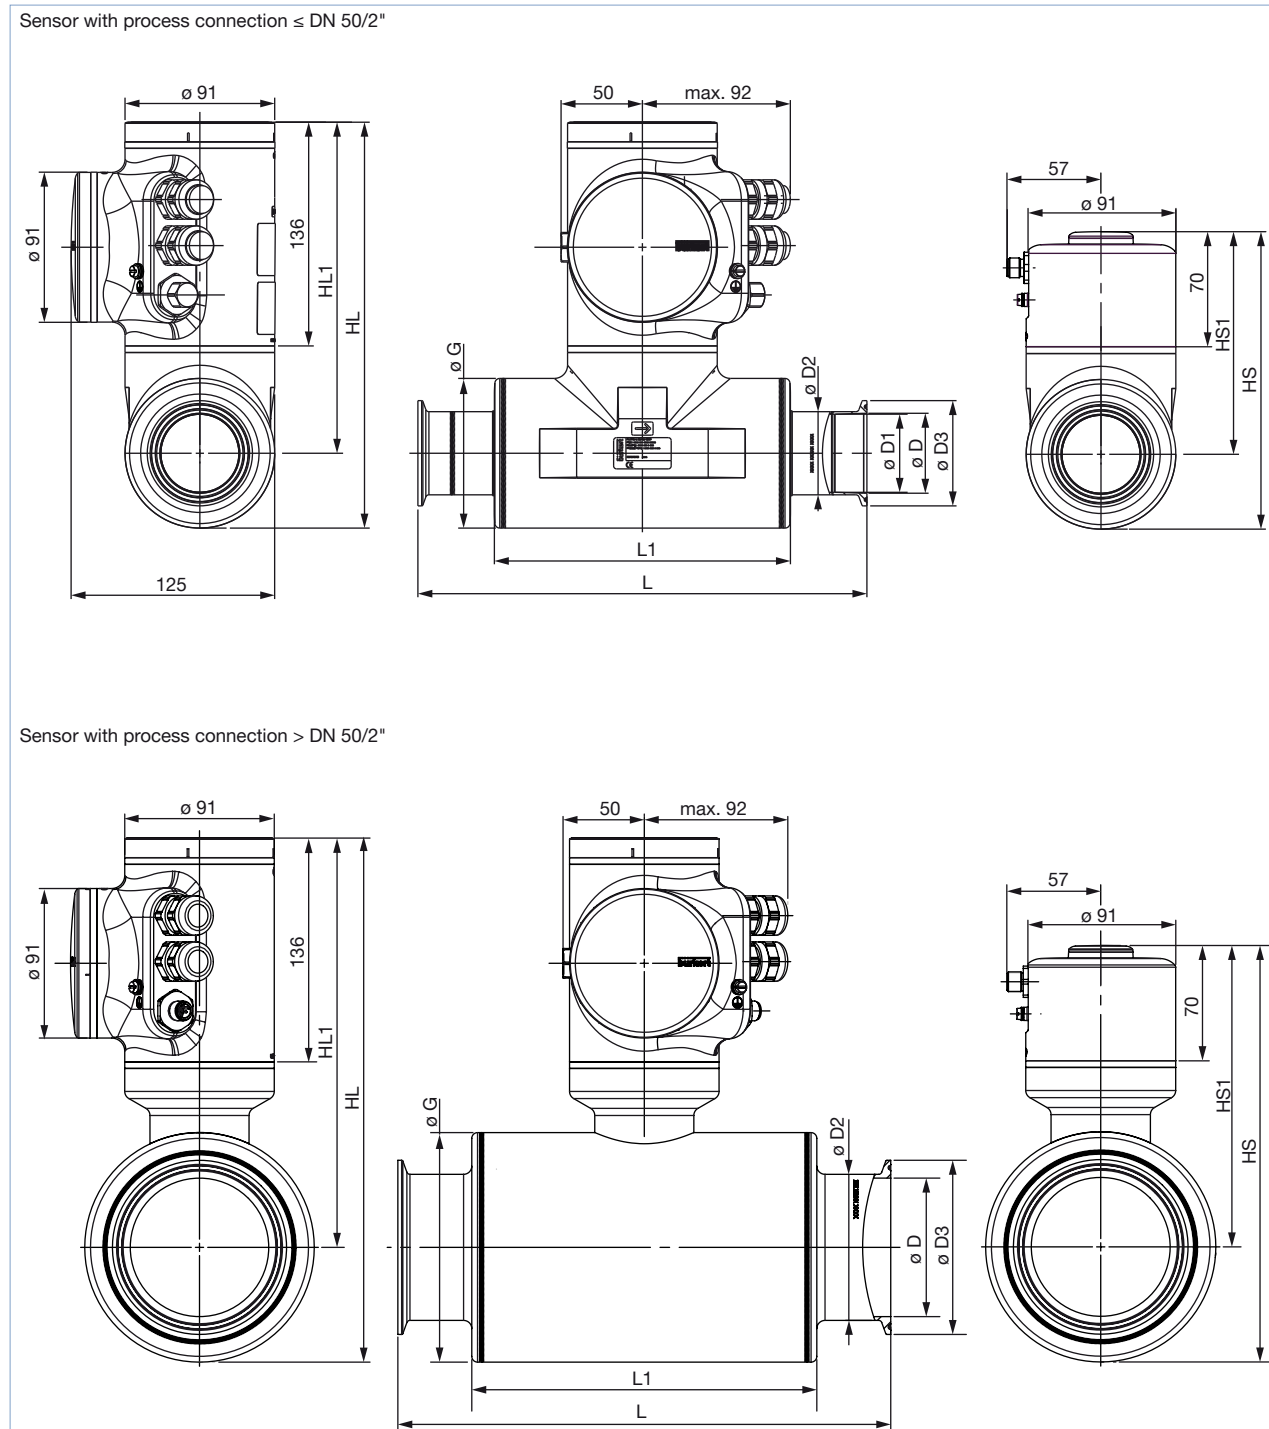

Clamp/pipe size												
[mm]	[inch]	HL	HL1	HS	HS1	D1	D	D2	D3	G	L1	L
Clamp according to DIN 32676 series A and process pipe according to DIN 11866 series A (DIN 11850)												
08	–	250	220	184	154	10	10	14	34	60.3	105	158
15 ^{1.)}	–	250	220	184	154	15.75	16	19.05	34	60.3	105	166
25 ^{1.)}	–	250	220	184	154	22.1	26	25.4	50.5	60.3	105	236
40 ^{1.)}	–	250	200	184	134	34.8	38	38.1	50.5	91	180	326
50 ^{1.)}	–	250	200	184	134	47.5	50	50.8	64	91	180	306
65	–	321	251	255	185	66	66	70	91	139.7	210	300
80	–	321	251	255	185	81	81	85	106	139.7	210	300
Clamp according to DIN 32676 series B and process pipe according to DIN 11866 series B (ISO 1127)												
08	–	250	220	184	154	10.3	10.3	14	25	60.3	105	158
15	–	250	220	184	154	18.1	18.1	21.3	50.5	60.3	105	168
15 ^{2.)}	–	250	220	184	154	18.1	18.1	21.3	34	60.3	105	168
25	–	250	220	184	154	29.7	29.7	33.7	50.5	60.3	120	175
40	–	250	200	184	134	44.3	44.3	48.3	64	91	180	273
50	–	250	200	184	134	56.3	56.3	60.3	77.5	91	180	273
65	–	321	251	255	185	72.1	72.1	76.1	91	139.7	210	300
80	–	321	251	255	185	84.3	84.3	88.9	106	139.7	210	300
Clamp according to DIN 32676 series C and process pipe according to DIN 11866 series C (ASME BPE)												
–	¾	250	220	184	154	7.75	7.75	14	25	60.3	105	158
–	½	250	220	184	154	9.4	9.4	14	25	60.3	105	158
–	¾	250	220	184	154	15.75	15.75	19.05	25	60.3	105	143
–	1	250	220	184	154	22.1	22.1	25.4	50.5	60.3	105	143
–	1½	250	200	184	134	34.8	34.8	38.1	50.5	91	180	273
–	2	250	200	184	134	47.5	47.5	50.8	64	91	180	273
–	2½	321	251	255	185	60.2	60.2	63.5	77.5	139.7	210	300
–	3	321	251	255	185	72.9	72.9	76.2	91	139.7	210	300
Clamp according to SMS 3017 and process pipe according to SMS 3008												
25 ^{1.)}	–	250	220	184	154	22.1	22.6	25.4	50.5	60.3	105	143
40 ^{1.)}	–	250	200	184	134	34.8	35.6	38.1	50.5	91	180	273
50 ^{1.)}	–	250	200	184	134	47.5	48.6	50.8	64	91	180	273

1.) DIN 32676 series A and SMS 3017 based on ASME BPE pipe dimension with adapted concentric clamp design


Design according to EHEDG DOC8 guidelines

2.) Similar to DIN 32676 series B but with clamp 34.0

4.5. Flowmeter with aseptic collar flange (BF)

Note:

- Specifications in mm (unless specified differently)
- Aseptic collar flange (BF) according to DIN 11864-2 form A series A, B or C

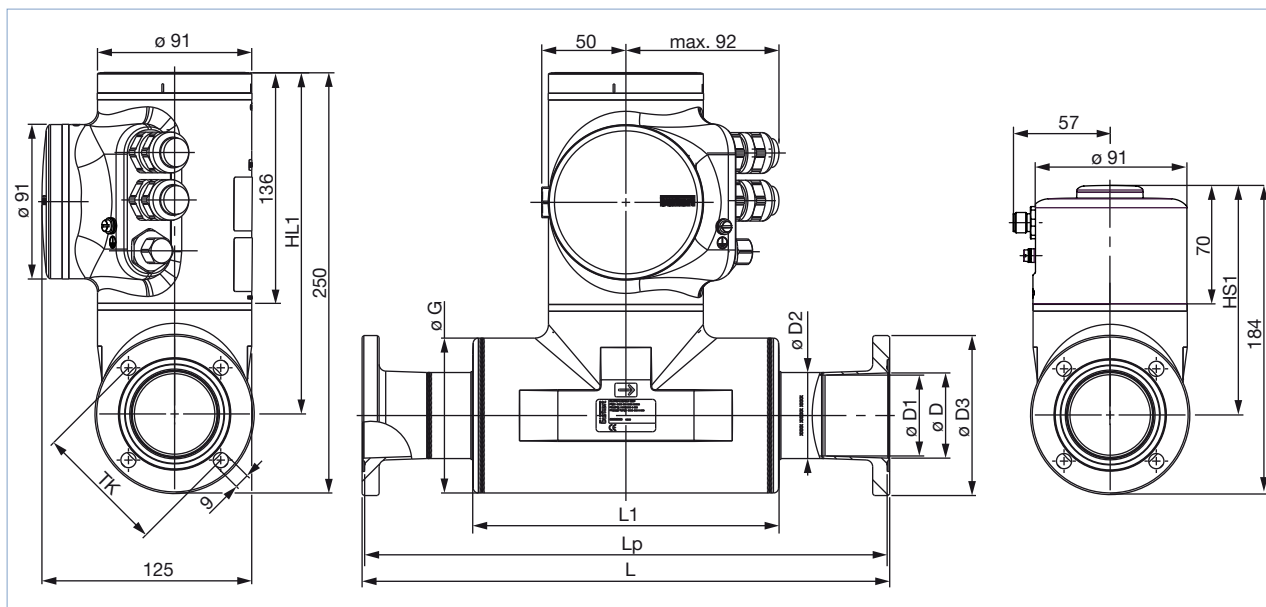

Flange/pipe size												
[mm]	[inch]	HL1	HS1	TK	D1	D	D2	D3	G	L1	Lp	L
Flange according to DIN 11864-2 series A and process pipe according to DIN 11866 series A (DIN 11850)												
15 ^{1.)}	–	220	154	42	15.75	16	19.05	59	60.3	105	163	166
25 ^{1.)}	–	220	154	53	22.1	26	25.4	70	60.3	105	237	240
40 ^{1.)}	–	200	134	65	34.8	38	38.1	82	91	180	327	330
50 ^{1.)}	–	200	134	77	47.5	50	50.8	94	91	180	307	310
Flange according to DIN 11864-2 series B and process pipe according to DIN 11866 series B (ISO 1127)												
08	–	220	154	37	10.3	10.3	14	54	60.3	105	155	158
15	–	220	154	45	18.1	18.1	21.3	62	60.3	105	170	173
25	–	220	154	57	29.7	29.7	33.7	74	60.3	120	187	190
40	–	200	134	71	44.3	44.3	48.3	88	91	180	275	278
50	–	200	134	85	56.3	56.3	60.3	103	91	180	262	265
Flange according to DIN 11864-2 series C and process pipe according to DIN 11866 series C (ASME BPE)												
–	½	220	154	37	9.4	9.4	14	54	60.3	105	155	158
–	¾	220	154	42	15.75	15.75	19.05	59	60.3	105	168	171
–	1	220	154	49	22.1	22.1	25.4	66	60.3	105	165	168
–	1½	200	134	62	34.8	34.8	38.1	79	91	180	275	278
–	2	200	134	75	47.5	47.5	50.8	92	91	180	275	278


1.) DIN 11864-2 series A based on ASME BPE pipe dimension with adapted concentric clamp design
Design according to EHEDG DOC8 guidelines

DTS 1000270652 EN Version: Q Status: RL (released | freigegeben | valide) printed: 28.02.2022

4.6. Flowmeter with aseptic collar clamp (BKS)

Note:

- Specifications in mm (unless specified differently)
- Aseptic collar clamp (BKS) according to DIN 11864-3 form A series A, B or C

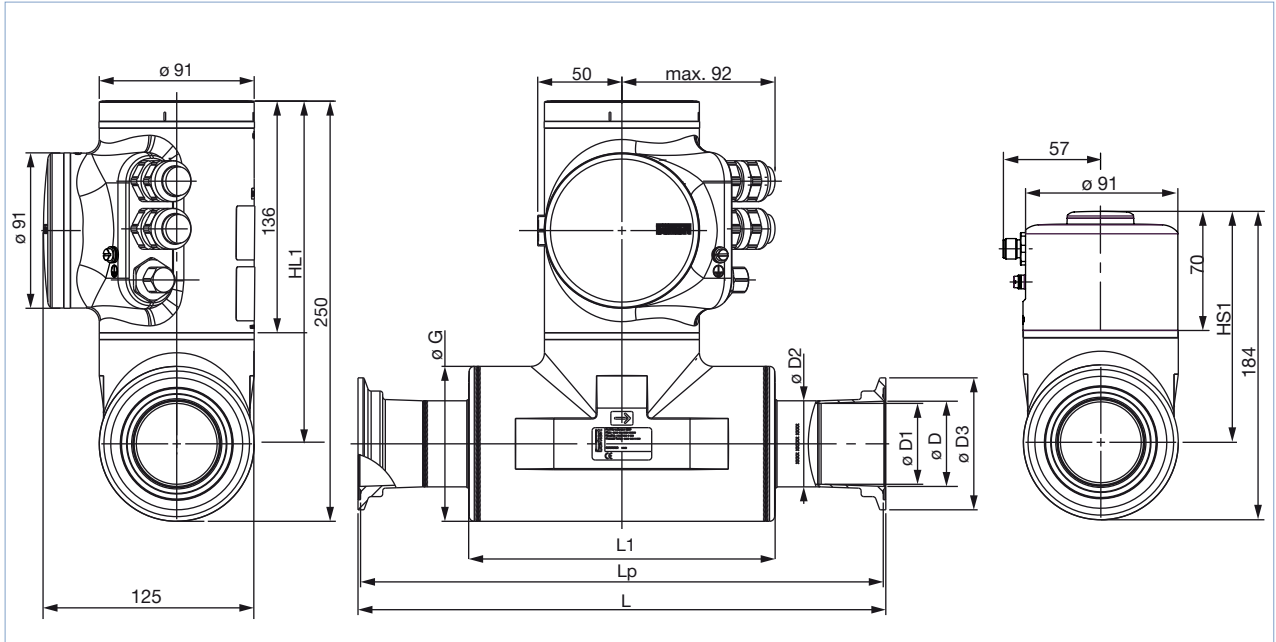


Clamp/pipe size											
[mm]	[inch]	HL1	HS1	D1	D	D2	D3	G	L1	Lp	L
Clamp according to DIN 11864-3 series A and process pipe according to DIN 11866 series A (DIN 11850)											
15 ^{1.)}	-	220	154	15.75	16	19.05	34	60.3	105	163	166
25 ^{1.)}	-	220	154	22.1	26	25.4	50.5	60.3	105	237	240
40 ^{1.)}	-	200	134	34.8	38	38.1	64	91	180	327	330
50 ^{1.)}	-	200	134	47.5	50	50.8	77.5	91	180	307	310
Clamp according to DIN 11864-3 series B and process pipe according to DIN 11866 series B (ISO 1127)											
08	-	220	154	10.3	10.3	14	34	60.3	105	155	158
15	-	220	154	18.1	18.1	21.3	34	60.3	105	166	169
25	-	220	154	29.7	29.7	33.7	50.5	60.3	120	187	190
40	-	200	134	44.3	44.3	48.3	64	91	180	277	280
50	-	200	134	56.3	56.3	60.3	91	91	180	268	271
Clamp according to DIN 11864-3 series C and process pipe according to DIN 11866 series C (ASME BPE)											
-	½	220	154	9.4	9.4	14	34	60.3	105	155	158
-	¾	220	154	15.75	15.75	19.05	34	60.3	105	164	167
-	1	220	154	22.1	22.1	25.4	50.5	60.3	105	161	164
-	1½	200	134	34.8	34.8	38.1	64	91	180	275	278
-	2	200	134	47.5	47.5	50.8	77.5	91	180	276	279

1.) DIN 11864-3 series A based on ASME BPE pipe dimension with adapted concentric clamp design
Design according to EHEDG DOC8 guidelines

4.7. Flowmeter with thread connection

Note:

- Specifications in mm (unless specified differently)
- Thread connection according to DIN 11851 series A

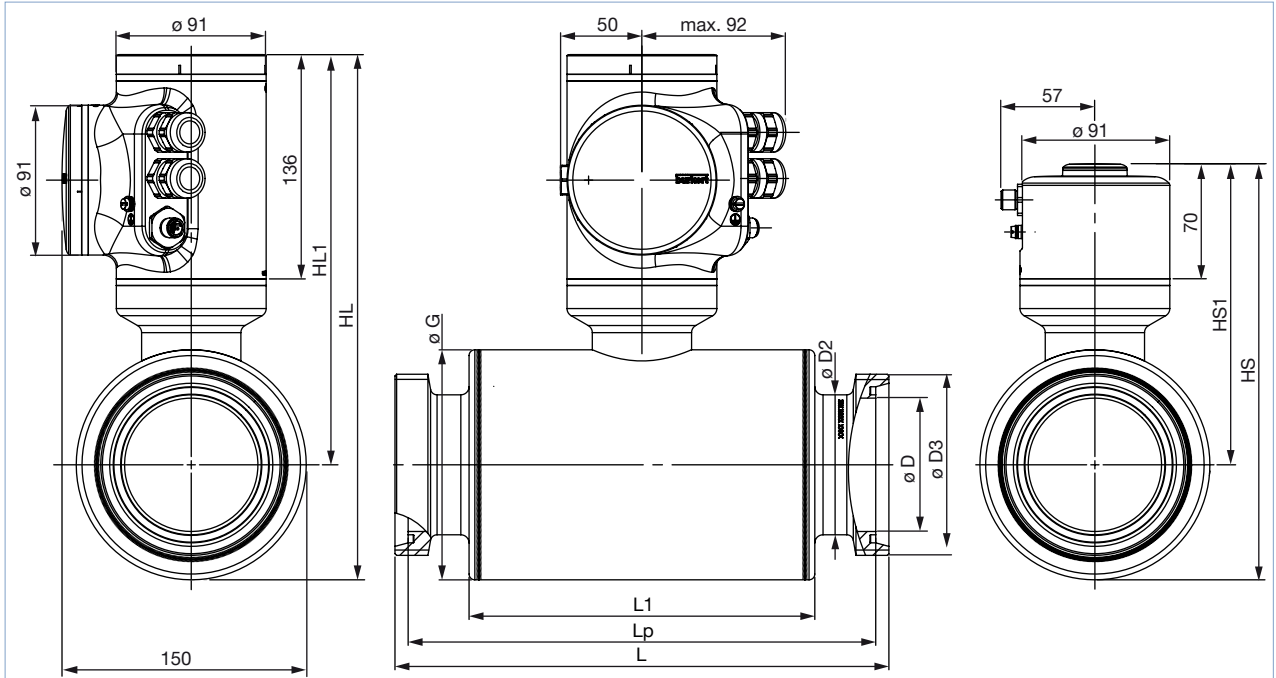


Thread/pipe size												
[mm]	HL	HL1	HS	HS1	D	D2	D3 ^{1.)}	G	L1	Lp	L	
Thread according to DIN 11851												
65	321	251	255	185	66	70	Rd 95 x 1/6	139.7	210	284	300	
80	321	251	255	185	81	85	Rd 110 x 1/4	139.7	210	284	300	

1.) Thread according to DIN 405-1

5. Performance specifications

5.1. Medium temperature

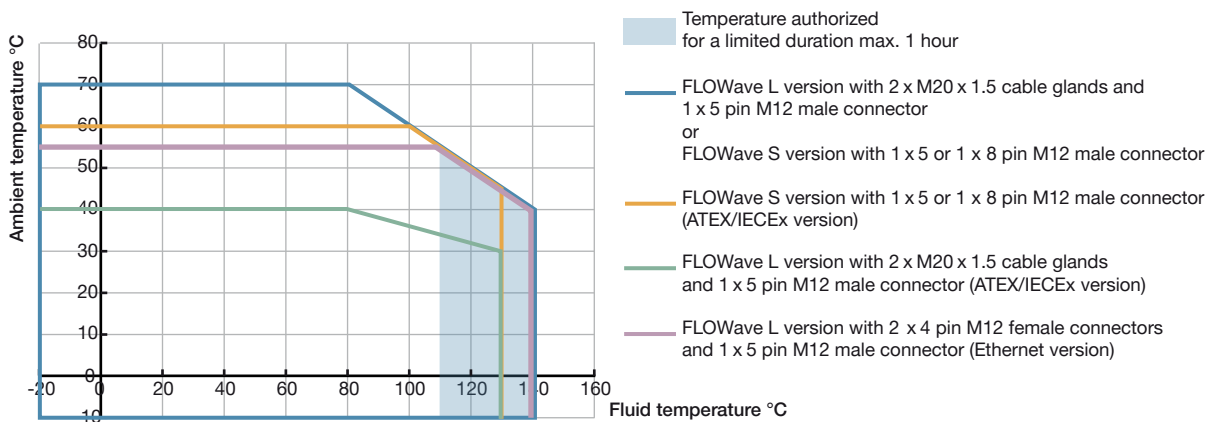

DTS 1000270652 EN Version: Q Status: RL (released | freigegeben | valide) printed: 28.02.2022

5.2. Measurement deviation

Note:

This table shows the measurement deviations according to the pipe connection standards per measuring range.

DN	Pipe standard	Flow velocity in sensor tube [m/s]	0.1	1	10
⅝"	ASME BPE	Volume flow rate range [m³/h]	0.017 ± 0.08 % of full scale	0.17 ± 0.4 % of measured value	1.7
½"	ASME BPE	Volume flow rate range [m³/h]	0.025 ± 0.08 % of full scale	0.25 ± 0.4 % of measured value	2.5
08	ISO 1127 DIN 11850	Volume flow rate range [m³/h]	0.03 ± 0.08 % of full scale	0.30 ± 0.4 % of measured value	3
¾" 15	ASME BPE DIN 11850	Volume flow rate range [m³/h]	0.07 ± 0.08 % of full scale	0.7 ± 0.4 % of measured value	7
15	ISO 1127	Volume flow rate range [m³/h]	0.10 ± 0.08 % of full scale	1.0 ± 0.4 % of measured value	10
1" 25 25 25	ASME BPE DIN 11850 SMS 3008 ISO 1127	Volume flow rate range [m³/h]	0.14 ± 0.08 % of full scale	1.4 ± 0.4 % of measured value	14
25	ISO 1127	Volume flow rate range [m³/h]	0.25 ± 0.08 % of full scale	2.5 ± 0.4 % of measured value	25
1½" 40 40 40	ASME BPE DIN 11850 SMS 3008 ISO 1127	Volume flow rate range [m³/h]	0.35 ± 0.08 % of full scale	3.5 ± 0.4 % of measured value	35
40	ISO 1127	Volume flow rate range [m³/h]	0.56 ± 0.08 % of full scale	5.6 ± 0.4 % of measured value	56
2" 50 50 50	ASME BPE DIN 11850 SMS 3008 ISO 1127	Volume flow rate range [m³/h]	0.64 ± 0.08 % of full scale	6.4 ± 0.4 % of measured value	64
50	ISO 1127	Volume flow rate range [m³/h]	0.90 ± 0.08 % of full scale	9.0 ± 0.4 % of measured value	90
2½"	ASME BPE	Volume flow rate range [m³/h]	1.02 ± 0.08 % of full scale	10.2 ± 0.4 % of measured value	102
65	DIN 11850	Volume flow rate range [m³/h]	1.23 ± 0.08 % of full scale	12.3 ± 0.4 % of measured value	123
65	ISO 1127	Volume flow rate range [m³/h]	1.47 ± 0.08 % of full scale	14.7 ± 0.4 % of measured value	147
3"	ASME BPE	Volume flow rate range [m³/h]	1.50 ± 0.08 % of full scale	15.0 ± 0.4 % of measured value	150
80	DIN 11850	Volume flow rate range [m³/h]	1.85 ± 0.08 % of full scale	18.5 ± 0.4 % of measured value	185
80	ISO 1127	Volume flow rate range [m³/h]	2.00 ± 0.08 % of full scale	20.0 ± 0.4 % of measured value	200

6. Product installation

6.1. Installation notes

Note:

The flowmeter is not designed for gas and steam flow measurement. However, their flow does not have any negative effect on the device or its operation. Other liquids flowing through again afterwards are measured correctly as before.

The factory calibration of the FLOWave is done under reference conditions with inlet (40xDN) and outlet (1 xDN) distances and the appropriate internal diameter of the pipes.

Deviation from reference conditions can be easily adjusted through the use of a built-in K factor adjustment or Teach in procedure. We can support you if necessary, please do not hesitate to contact us.

The device can be installed into either horizontal, oblique or vertical pipes. But an installation on a vertical pipe will be better to prevent air or gas bubbles inside the measurement area. **For proper operation always ensure a totally filled measurement tube.**

Conformity to 3A and EHEDG requires an angle of at least 5° (for SMS or series A connections) or 3° (all others available connections) against horizontal to ensure complete draining however this not necessary for proper operation of the FLOWave.

The suitable pipe size can be selected using the diagram for selecting the nominal diameter of the pipe. See chapter "6.2. Selection of the nominal diameter" on page 25.

6.2. Selection of the nominal diameter

The graph is used to determine the DN of the pipe and the flowmeter appropriate to the application, according to the fluid velocity and the flow rate. On the chart, the intersection of flow rate and flow velocity gives the appropriate diameter.

Example 1:


Flowmeter with process connection according to DIN 32676 series B (pipe ISO 1127) or DIN 11864-2 form A series B (pipe ISO 1127)

- Flow: 10 m³/h
 - Optimal flow rate: 1...3 m/s
- Result: Select a pipe size of DN 40 or DN 50

Example 2:

Flowmeter with process connection according to DIN 32676 series A (pipe DIN 11850) or DIN 11864-2 series A (pipe DIN 11850)


- Flow: 10 m³/h
 - Optimal flow rate: 1...3 m/s
- Result: Select a pipe size of DN 40 or DN 50

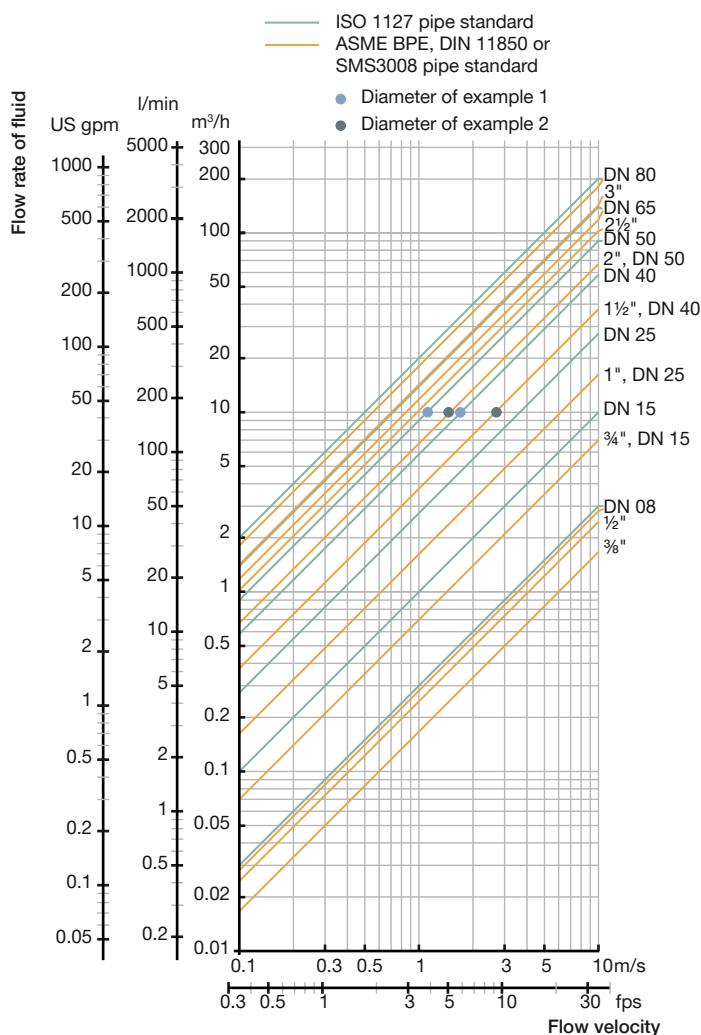

6.3. Mounting options


FLOWave L flowmeter

The product is delivered as described in position 1 in the picture below. The position of the transmitter can be changed in 90° steps. The position of the display or Wi-Fi module and the blind cover can also be changed in steps of 90° both on the top of the unit and on the front face.

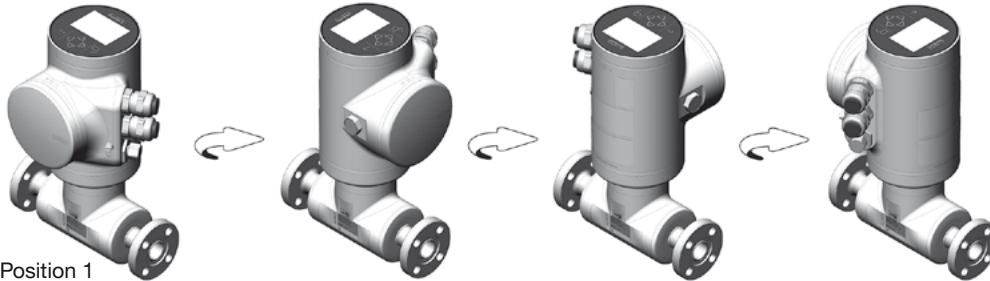

Position 1

For safety reasons the display or Wi-Fi module and blind cover on the top or front are locked. The display or Wi-Fi module and blind cover can be unlocked with a magnetic key which is included in the delivery of each device.

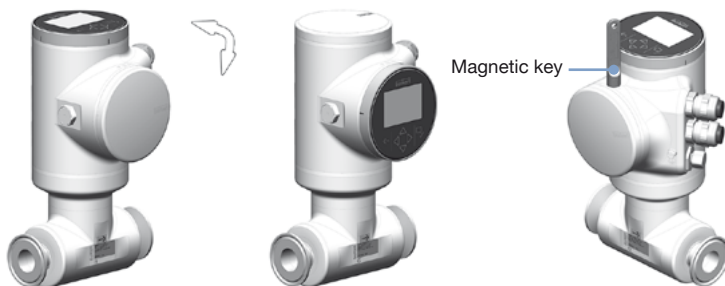

FLOWave S flowmeter

The product is delivered as described in position 1 in the picture below. The position of the transmitter can be changed in 90° steps. For safety reasons the transmitter is locked. The transmitter can be unlocked with a magnetic key which is included in the delivery of each device.



Position 1

7. Product operation


7.1. Measuring principle

The technology used is based on SAW (Surface Acoustic Waves). The type of wave propagation is similar to what happens when an earthquake occurs in nature.

In the case of FLOWave it is a miniaturized signal, not running on the surface of the earth but on a measurement tube. FLOWave uses so called interdigital transducers which are placed on flattened areas of the tube surface. Each one acts as emitter as well as receiver. Two of them (nos. 1 and 4) emit forward, in the direction of the liquid flow, the others (nos. 2 and 3) backwards, i.e. in the opposite direction to the direction of flow. The propagation time is measured from emitter to receiver. The difference between the forward and backward propagation time of the waves is proportional to the volume flow rate.

The high performance measurement is achieved by the following aspects:

- Each emitter sends multiple signals that are received on two other receivers
- The results are based on the reception of the signals that pass through the liquid one or more times.
- Several measurements can be performed based on the collected information. Many properties of the liquid can be derived, including the flow velocity, the fraction of the transmitted signal (“acoustic transmission factor”), and the so-called “density factor” (see below), as well as information about the presence of gas bubbles or solid parts.

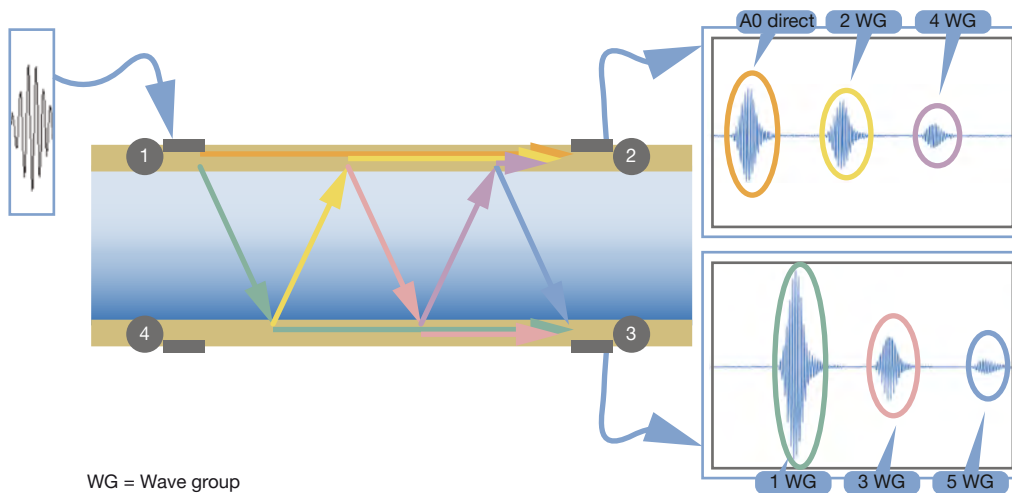

This figure shows, as an example, the reception signals when interdigital transducer 1 is transmitting. The emitter excitation produces the SAW with a frequency of more than 1 MHz.

As a result of the emission of these waves, the following effects occur:

- A wave propagates along the surface of the tube (see orange line).
- A wave is emitted (see green line) and passes through the liquid towards the opposite side of the tube at a certain angle, which depends mainly on the speed of propagation on the surface of the tube and in the liquid.
- Upon reaching the opposite side of the tube, two effects take place.
 - A wave is triggered in the tube and propagates (see green line) to receiver 3
 - A wave is triggered in the liquid (see yellow line) and passes through it again to the opposite wall of the tube.

These effects are repeated and thus generate the many signals received, which are differentiated in the image with different colors.

7.2. Special functions

For the detection of gas bubbles and solid particles the device (from firmware version 01.05.00) includes a so called “acoustic transmission factor” with a measurement range of 5...120 %, whose value is constantly recorded and directly influenced by the presence of gas bubbles and solid particles.

A “density factor”, with a measuring range of 0.8...1.3, is available for the detection and differentiation of liquids. This continuously measured value, which uses water as reference fluid, is temperature-compensated and so its value is representative in a tight value range for each liquid. The changes in value of this process measurement enable differentiation between different liquids.

8. Product design and assembly


8.1. Product assembly

The 8098 flowmeter consists of a S097 flow sensor and a SE98 transmitter (FLOWave L flowmeter) or SE91 transmitter (FLOWave S flowmeter).

The flow sensor includes the measurement tube equipped with interdigital transducers, the sensor housing and the process connections in accordance to the standards ISO, ASME BPE, DIN, SMS. At present the sensor size ranges from DN 08 to DN 80 or from 3/8" to 3".

The FLOWave L flowmeter is available with or without display. The high resolution display includes a capacitive working keypad for all interactive user actions, guided by a user friendly menu system. The output signals include one analogue output and one digital output; while a third output signal can be switched between analogue and digital through parametrisation. Electrical connection is done on push-in connectors via two cable glands and/or one M12 connector.

The FLOWave S flowmeter is only available without display. The electrical connection is made via an M12 connector.

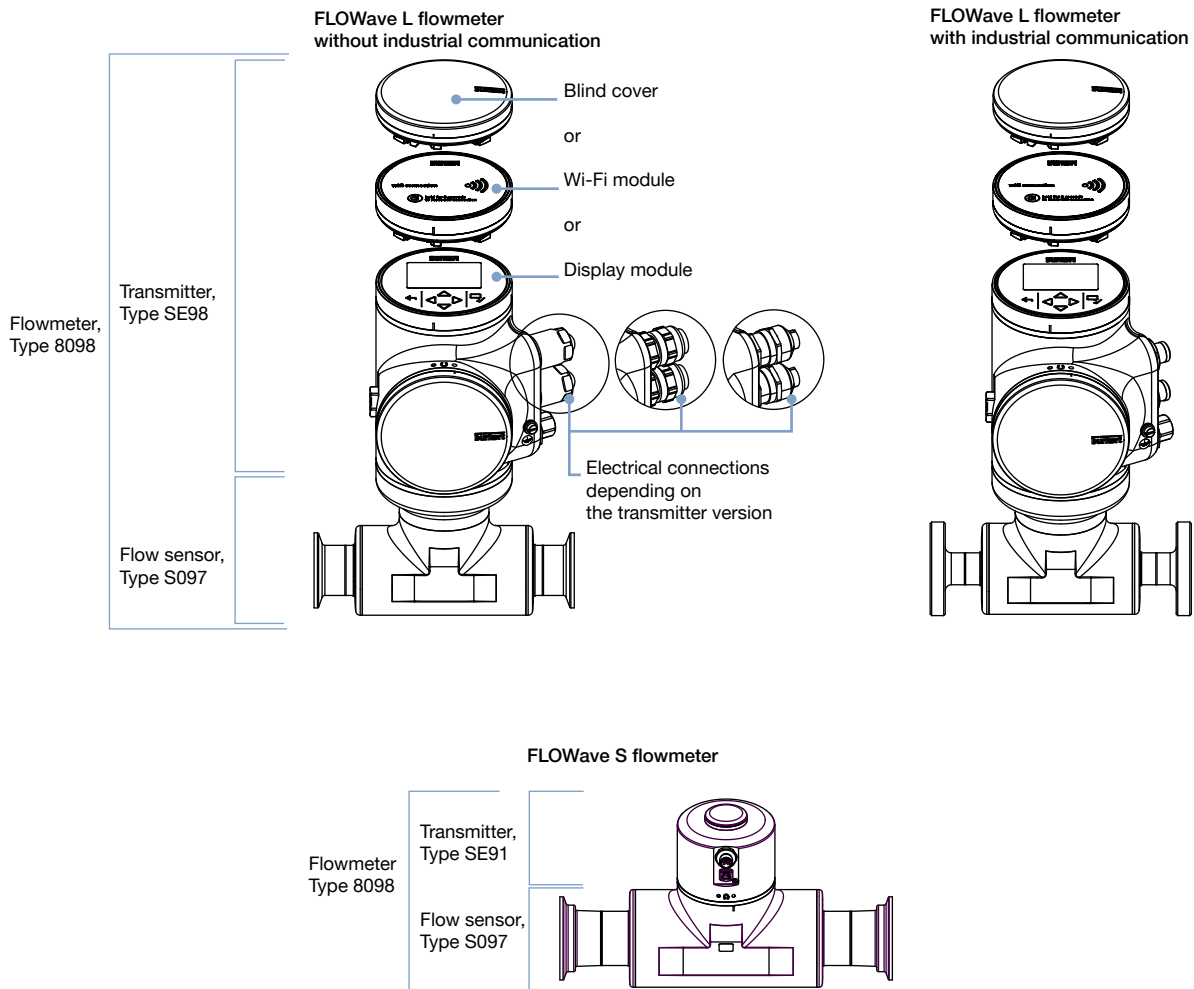

DTS 1000270652 EN Version: Q Status: RL (released | freigegeben | validé) printed: 28.02.2022

9. Product accessories

Note:


To set up a device without a display, please use the USB-büS interface, Type 8923, the Bürkert Communicator Type 8920. For the FLOWave S with two outputs, the büS adaptor cable article no. 773286 is required too.

See **Software manual Type 8920** ▶ for more information.

Accessories	No.	Description
	1	Quick-Start
	2	Power supply: 100...240 V AC/ 24 V DC 1 A and adaptors for power supply worldwide use
	3	büS terminating resistor on büS Y-splitter
	4	5 pin M12 male connector wired on free end cable
	5	büS connection cable with 5 pin M12 plug, micro USB B plug
	6	büS adapter with 5 pin M12 plug, A-coded to 5 pin M12 plug, A-coded
	7	büS stick (USB to büS/CANopen adaptor)
	8	büS service cable with 5 pin M12 plug, mini USB and circular plug-in connectors for power supply
	9	Magnetic key
	10	CD - Communicator (30-day license without registration, update and licensing over Bürkert home page)

10. Ordering information

10.1. Bürkert eShop – Easy ordering and quick delivery



Bürkert eShop – Easy ordering and fast delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

Order online now

10.2. Recommendation regarding product selection

Note:

- The installation of the flowmeter in a pipe requires the use of counter-connection, seals, fixing elements, etc. depending on the used norm.
- The drawings show the installation with a standard version of the flow meter. The installation is also valid for the compact version.

For instance with middle-sized devices:

Connection	Description
	<p>With clamp according to DIN 32676 series A</p> <p>To insert a FLOWave DN 40 with clamps according to DIN 32676 series A (with Ra <0.8 µm) to a pipe according to DIN 11866 series A (DIN 11850), the correct adapters to be selected and separately ordered are for instance</p> <ul style="list-style-type: none"> • 2x BBS-25 clamp ferrules, Article no. 747237, see data sheet Type BBS-25 ▶ for more information • 2x the appropriate seals (not provided) • 2x the corresponding clamps, Article no. 731164

Connection	Description
	<p>With aseptic collar flange (BF) according to DIN 11864-2 form A To insert a FLOWave DN 40 with collar flanges according to DIN 11864-2 series B (with Ra < 0.8 µm) to a pipe according to DIN 11866 series B (ISO 1127), the correct adapters to be selected and separately ordered are for instance</p> <ul style="list-style-type: none"> • 2x BBS-06 aseptic groove flange, Article no. 731860, see data sheet Type BBS-06 ▶ for more information • 2x the appropriate seals (not provided) • 8x the corresponding screws, flat washers and nuts (please refer to the DIN 11864-2 standard)
	<p>With aseptic collar clamp (BKS) according to DIN 11864-3 form A To insert a FLOWave 1" with hygienic collar clamps according to DIN 11864-3 series C (with Ra < 0.8 µm) to a pipe according to DIN 11866 series C (ASME BPE), the correct adapters to be selected and separately ordered are for instance</p> <ul style="list-style-type: none"> • 2x BBS-05 aseptic groove clamp, Article no. 730272, see data sheet Type BBS-05 ▶ for more information • 2x the appropriate seals (not provided) • 2x the corresponding clamps, Article no. 731164
	<p>With thread according to DIN 11851 To insert a FLOWave with thread according to DIN 11851 series A to a pipe according to DIN 11850, suitable adapters (not available from Bürkert) are required, for instance</p> <ul style="list-style-type: none"> • 2x the conical ferrule • 2x the appropriate DIN 11851 seal • 2x the corresponding round slotted nut

10.3. Bürkert product filter

Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

Try out our product filter

10.4. Bürkert 3D Model - Interactive Animation

Applications & Tools

CAD Model

Interactive Animation

Bürkert 3D Model - Interactive Animation

3D Model and Interactive Animation are available on the website of the flowmeter Type 8098.



















See **website of the Type 8098** ▶ under “Applications and Tools”.

10.5. Ordering chart FLOWave L flowmeter with or without industrial communication

Clamp process connection acc. to DIN 32676 series A for pipe acc. to DIN 11866 series A (DIN 11850)

Note:

- To set up a device without a display, please use the USB-büS interface, Type 8923 (has to be ordered separately - see chapter "9. Product accessories" on page 29 and "10.7. Ordering chart accessories" on page 39).
- Device with Wi-Fi module available on request.
- All these versions are equipped with the special functions ATF (acoustic transmission factor) and DF (density factor).

Clamp and pipe size	Surface quality		Clamp dimensions D2 x s; D3 (s = wall thickness)	Maximal flow rate	Display	Certifications		Article no.
	Housing and outer surface of measurement tube	Inner surface of measurement tube				3A (28-06)	EHEDG ^{1.)}	
[mm]	[µm]	[µm]	[mm]	[m ³ /h]				
Version without industrial communication (2 cable glands^{2.)} M20x1.5 + 1 x 5 pin M12 male connector), operating voltage of 12...35 V DC								
08	Ra<1.6	Ra<0.8	14.0x2.0; 34.0	3	Yes	Yes	Yes	On request
					No			On request
		Ra<0.4			Yes			On request
					No			On request
15	Ra<1.6	Ra<0.8	19.05 x 1.65; 34.0	7	Yes	Yes	Yes	569159 
					No			569158 
		Ra<0.4			Yes			569161 
					No			569160 
25	Ra<1.6	Ra<0.8	25.4 x 1.65; 50.5	14	Yes	Yes	Yes	569163 
					No			569162 
		Ra<0.4			Yes			569165 
					No			569164 
40	Ra<1.6	Ra<0.8	38.1 x 1.65; 50.5	35	Yes	Yes	Yes	569167 
					No			569166 
		Ra<0.4			Yes			569169 
					No			569168 
50	Ra<1.6	Ra<0.8	50.8 x 1.65; 64.0	64	Yes	Yes	Yes	569171 
					No			569170 
		Ra<0.4			Yes			569173 
					No			569172 
65	Ra<1.6	Ra<0.8	70.0x2.0; 91.0	123	Yes	Yes	Yes	573445 
		Ra<0.4						
80	Ra<1.6	Ra<0.8	85.0x2.0; 106.0	185				573446 
		Ra<0.4						

1.) The EHEDG compliance is only if used in combination with gaskets from Combifit International B.V.

2.) Cable gland in nickel plated brass valid

Clamp process connection acc. to DIN 32676 series B for pipe acc. to DIN 11866 series B (ISO 1127)
Note:

- To set up a device without a display, please use the USB-büS interface, Type 8923 (has to be ordered separately - see chapter "9. Product accessories" on page 29 and "10.7. Ordering chart accessories" on page 39).
- Device with Wi-Fi module available on request.
- All these versions are equipped with the special functions ATF (acoustic transmission factor) and DF (density factor).

Clamp and pipe size	Surface quality		Clamp dimensions D2 x s; D3 (s = wall thickness)	Maximal flow rate	Display	Certifications		Article no.
	Housing and outer surface of measurement tube	Inner surface of measurement tube				3A (28-06)	EHEDG ^{1.)}	
[mm]	[µm]	[µm]	[mm]	[m³/h]				
Version without industrial communication (2 cable glands^{2.)} M20x1.5 + 1 x 5 pin M12 male connector), operating voltage of 12...35 V DC								
08	Ra < 1.6	Ra < 0.8	14 x 1.85; 25.0	3	Yes	Yes	Yes	573126 
					No			573127 
		Yes			573128 			
		No			573129 			
15	Ra < 1.6	Ra < 0.8	21.3 x 1.6; 50.5	10	Yes	Yes	Yes	566187 
					No		566235 	
					Yes		566191 	
					No		566236 	
		Ra < 0.4			Yes		Yes	566195 
					No		No	566237 
					Yes		Yes	566199 
					No		No	566238 
25	Ra < 1.6	Ra < 0.8	33.7 x 2.0; 50.5	25	Yes	Yes	Yes	566188 
					No		566192 	
		Yes			566196 			
		No			566200 			
40	Ra < 1.6	Ra < 0.8	48.3 x 2.0; 64.0	56	Yes	Yes	Yes	566189 
					No		566193 	
		Yes			566197 			
		No			566201 			
50	Ra < 1.6	Ra < 0.8	60.3 x 2.0; 77.5	90	Yes	Yes	Yes	566190 
					No		566194 	
		Yes			566198 			
		No			566202 			
65	Ra < 1.6	Ra < 0.8	76.1 x 2.0; 91.0	147	Yes	Yes	Yes	573442 
		Ra < 0.4			573370 			
80	Ra < 1.6	Ra < 0.8	88.9 x 2.3; 106.0	200	Yes	Yes	Yes	573443 
		Ra < 0.4			573371 			

1.) The EHEDG compliance is only valid if used in combination with gaskets from Combifit International B.V.

2.) Cable gland in nickel plated brass

Clamp process connection acc. to DIN 32676 series C for pipe acc. to DIN 11866 series C (ASME BPE)

Note:

- To set up a device without a display, please use the USB-büS interface, Type 8923 (has to be ordered separately - see chapter “9. Product accessories” on page 29 and “10.7. Ordering chart accessories” on page 39).
- Device with Wi-Fi module available on request.
- All these versions are equipped with the special functions ATF (acoustic transmission factor) and DF (density factor).

Clamp and pipe size	Surface quality		Clamp dimensions D2 x s; D3 (s = wall thickness)	Maximal flow rate	Display	Certifications			Article no.
	Housing and outer surface of measurement tube	Inner surface of measurement tube				3A (28-06)	EHEDG ¹⁾	UL	
[inch]	[µm]	[µm]	[mm]	[m ³ /h]					
Version without industrial communication (2 cable glands²⁾ M20x1.5 + 1 x 5 pin M12 male connector), operating voltage of 12...35 V DC									
3/8	Ra < 1.6	Ra < 0.8	14.00 x 3.125; 25.0	1.7	Yes	Yes	Yes	No	573112
					No				573113
		Ra < 0.4			Yes				573114
					No				573115
1/2	Ra < 0.8	Ra < 0.8	14.00 x 2.3; 25.0	2.5	Yes	Yes	Yes	No	573116
					No				573119
		Ra < 0.4			Yes				573120
					No				573121
3/4	Ra < 0.8	Ra < 0.8	19.05 x 1.65; 25.0	7	Yes	Yes	Yes	No	573122
					No				573123
		Ra < 0.4			Yes				566203
					No				566207
1	Ra < 0.8	Ra < 0.8	25.4 x 1.65; 50.5	14	Yes	Yes	Yes	No	566211
					No				566215
		Ra < 0.4			Yes				569675
					No				566204
1 1/2	Ra < 0.8	Ra < 0.8	38.1 x 1.65; 50.5	35	Yes	Yes	Yes	No	566212
					No				566216
		Ra < 0.4			Yes				569676
					No				566205
2	Ra < 0.8	Ra < 0.8	50.8 x 1.65; 64.0	64	Yes	Yes	Yes	No	566217
					No				566209
		Ra < 0.4			Yes				569677
					No				566210
2 1/2	Ra < 0.8	Ra < 0.8	63.5 x 1.65; 77.5	100	Yes	Yes	Yes	No	566218
					No				566213
		Ra < 0.4			Yes				574710
					No				573448
3	Ra < 0.8	Ra < 0.8	76.2 x 1.65; 91.0	150	Yes	Yes	Yes	No	573449
					No				573377
		Ra < 0.4			Yes				574711
					No				573376

DTS 1000270652 EN Version: Q Status: RL (released | freigegeben | valide) printed: 28.02.2022

Clamp and pipe size	Surface quality		Clamp dimensions D2 x s; D3 (s = wall thickness)	Maximal flow rate	Display	Certifications			Article no.
	Housing and outer surface of measurement tube	Inner surface of measurement tube				3A (28-06)	EHEDG ^{1.)}	UL	
[inch]	[µm]	[µm]	[mm]	[m ³ /h]					
Version with industrial communication (Ethernet version, 2 x 4 pin M12 female connectors + 1 x 5 pin M12 male connector), operating voltage of 12...35 V DC									
3/8	Ra < 1.6	Ra < 0.4	14.00 x 3.125; 25.0	1.7	Yes	Yes	Yes	No	573117
			Yes	573118					
1/2			14.00 x 2.3; 25.0	2.5				No	573124
			Yes	573125					
3/4			19.05 x 1.65; 25.0	7				No	570444
			Yes	569679					
1			25.4 x 1.65; 50.5	14				No	570445
			Yes	569680					
1 1/2			38.1 x 1.65; 50.5	35				No	570446
			Yes	569681					
2	50.8 x 1.65; 64.0	64	No	570447					
	Yes	569682							
2 1/2	63.5 x 1.65; 77.5	100	No	574716					
	Yes	574720							
3	76.2 x 1.65; 91.0	150	No	574717					
	Yes	574721							

1.) The EHEDG compliance is only valid if used in combination with gaskets from Combifit International B.V.

2.) Cable gland in nickel plated brass

Thread process connection acc. to DIN 11851 series A for pipe acc. to DIN 11866 series A (DIN 11850)

Note:

- To set up a device without a display, please use the USB-büS interface, Type 8923 (has to be ordered separately - see chapter "9. Product accessories" on page 29 and "10.7. Ordering chart accessories" on page 39).
- Device with Wi-Fi module available on request.
- All these versions are equipped with the special functions ATF (acoustic transmission factor) and DF (density factor).






Thread and pipe size	Surface quality		Thread connection dimensions D2 x s; D3 (s = wall thickness)	Maximal flow rate	Display	Certifications			Article no.
	Housing and outer surface of measurement tube	Inner surface of measurement tube				3A (28-06)	EHEDG ^{1.)}		
[mm]	[µm]	[µm]	[mm]	[m ³ /h]					
Version without industrial communication (2 cable glands^{2.)} M20x1.5 + 1 x 5 pin M12 male connector), operating voltage of 12...35 V DC									
65	Ra < 1.6	Ra < 0.8	70.0 x 2.0; Rd 95 x 1/6	123	Yes	Yes	Yes	573463	
80		Ra < 0.8	85.0 x 2.0; Rd 110 x 1/4	185				573464	

1.) The EHEDG compliance is only valid if used in combination with EHEDG-compliant gaskets from

1. Kieselmann GmbH, Germany (ASEPTO-STAR k-flex upgrade gaskets) or

2. Siersema Componenten Service (S.K.S.) B.V. (Netherlands SKS gasket set DIN 11851 EHEDG with EPDM or FKM inner gasket)

2.) Cable gland in nickel plated brass

Further versions on request	
 <p>Process connection</p> <ul style="list-style-type: none"> For pipe DIN 11850: <ul style="list-style-type: none"> Clamp DIN 11864-3 Flange DIN 11864-2 For pipe ISO 1127: <ul style="list-style-type: none"> Clamp DIN 11864-3 Flange DIN 11864-2 For pipe ASME BPE: <ul style="list-style-type: none"> Clamp DIN 11864-3 Flange DIN 11864-2 For pipe SMS 3008: SMS 3017 	<div style="display: flex; align-items: center;">  <p>Additional</p> <ul style="list-style-type: none"> With/without display Wi-Fi module (only for EU and north America) Without density factor (DF) Without acoustic transmission factor (ATF) Ethernet module (EtherNet/IP, PROFINET, Modbus TCP/IP, ETHERCAT) ATEX/IECEX </div> <div style="display: flex; align-items: center; margin-top: 10px;">  <p>Material</p> <ul style="list-style-type: none"> With inner surface of measurement tube <ul style="list-style-type: none"> Ra < 0.8 µm (30 µin.) Ra < 0.4 µm (15 µin.) (electro-polished) according to ISO 4288 </div>
 <p>Orifice</p> <ul style="list-style-type: none"> 08...80 mm ¾...3 inch 	 <p>Electrical connection</p> <p>Cable gland in stainless steel</p>

For any other versions, please use the product enquiry form at the end of this data sheet.

10.6. Ordering chart FLOWave S flowmeter

Clamp process connection acc. to DIN 32676 series A for pipe acc. to DIN 11866 series A (DIN 11850)

Note:

All these versions are equipped with the special functions ATF (acoustic transmission factor) and DF (density factor).





























Clamp and pipe size	Surface quality		Clamp dimensions D2 x s; D3 (s = wall thickness)	Maximal flow rate	Certifications		Article no.
	Housing and outer surface of measurement tube	Inner surface of measurement tube			3A (28-06)	EHEDG ^{1.)}	
[mm]	[µm]	[µm]	[mm]	[m³/h]			
Electrical connection: 1 x 8 pin M12 male connector, operating voltage of 12...35 V DC							
65	Ra < 1.6	Ra < 0.8	70.0x2.0; 91.0	123	Yes	Yes	574689
		Ra < 0.4					573421
80		Ra < 0.8	85.0x2.0; 106.0	185			574690
		Ra < 0.4					573422

1.) The EHEDG compliance is only valid if used in combination with gaskets from Combifit International B.V.

Clamp process connection acc. to DIN 32676 series B for pipe acc. to DIN 11866 series B (ISO 1127)

Note:

All these versions are equipped with the special functions ATF (acoustic transmission factor) and DF (density factor).

Clamp and pipe size	Surface quality		Clamp dimensions D2 x s; D3 (s = wall thickness)	Maximal flow rate	Certifications		Article no.
	Housing and outer surface of measurement tube	Inner surface of measurement tube			3A (28-06)	EHEDG ^{1.)}	
[mm]	[µm]	[µm]	[mm]	[m ³ /h]			
Electrical connection: 1 x 5 pin M12 male connector, operating voltage of 12...35 V DC							
08	Ra<1.6	Ra<0.8	14 x 1.85; 25.0	3	Yes	Yes	573716 
		Ra<0.4					573717 
15		Ra<0.8	21.3 x 1.6; 50.5	10		Yes	573093 
			21.3 x 1.6; 34.0			No	573094 
		Ra<0.4	21.3 x 1.6; 50.5			Yes	573098 
			21.3 x 1.6; 34.0			No	573099 
25		Ra<0.8	33.7 x 2.0; 50.5	25		Yes	573095 
		Ra<0.4					573100 
40	Ra<0.8	48.3 x 2.0; 64.0	56		573096 		
	Ra<0.4				573101 		
50	Ra<0.8	60.3 x 2.0; 77.5	90		573097 		
	Ra<0.4				573102 		
Electrical connection: 1 x 8 pin M12 male connector, operating voltage of 12...35 V DC							
08	Ra<1.6	Ra<0.8	14 x 1.85; 25.0	3	Yes	Yes	571780 
		Ra<0.4					571781 
15		Ra<0.8	21.3 x 1.6; 50.5	10		Yes	571782 
			21.3 x 1.6; 34.0			No	571783 
		Ra<0.4	21.3 x 1.6; 50.5			Yes	571784 
			21.3 x 1.6; 34.0			No	571785 
25		Ra<0.8	33.7 x 2.0; 50.5	25		Yes	571786 
		Ra<0.4					571787 
40	Ra<0.8	48.3 x 2.0; 64.0	56		571788 		
	Ra<0.4				571789 		
50	Ra<0.8	60.3 x 2.0; 77.5	90		571790 		
	Ra<0.4				571791 		
65	Ra<0.8	76.1 x 2.0; 91.0	147		574686 		
	Ra<0.4				573418 		
80	Ra<0.8	88.9 x 2.3; 106.0	200		574687 		
	Ra<0.4				573419 		

1.) The EHEDG compliance is only valid if used in combination with gaskets from Combifit International B.V.

Clamp process connection acc. to DIN 32676 series C for pipe acc. to DIN 11866 series C (ASME BPE)

Note:

All these versions are equipped with the special functions ATF (acoustic transmission factor) and DF (density factor).

Clamp and pipe size	Surface quality		Clamp dimensions D2 x s; D3 (s = wall thickness)	Maximal flow rate	Certifications			Article no.
	Housing and outer surface of measurement tube	Inner surface of measurement tube			3A (28-06)	EHEDG ¹⁾	UL	
[inch]	[µm]	[µm]	[mm]	[m ³ /h]				
Electrical connection: 1 x 5 pin M12 male connector, operating voltage of 12...35 V DC								
3/8	Ra<1.6	Ra<0.8	14.00x3.125; 25.0	1.7	Yes	Yes	No	573710
		Ra<0.4					Yes	573711
1/2	Ra<1.6	Ra<0.8	14.00x2.3; 25.0	2.5	Yes	Yes	No	573712
		Ra<0.4					Yes	573713
3/4	Ra<1.6	Ra<0.8	19.05x1.65; 25.0	7	Yes	Yes	No	573714
		Ra<0.4					Yes	573715
1	Ra<1.6	Ra<0.8	25.4x1.65; 50.5	14	Yes	Yes	No	573085
		Ra<0.4					Yes	573086
1 1/2	Ra<1.6	Ra<0.8	38.1x1.65; 50.5	35	Yes	Yes	No	573087
		Ra<0.4					Yes	573088
2	Ra<1.6	Ra<0.8	50.8x1.65; 64.0	64	Yes	Yes	No	573089
		Ra<0.4					Yes	573090
Electrical connection: 1 x 8 pin M12 male connector, operating voltage of 12...35 V DC								
3/8	Ra<1.6	Ra<0.8	14.00x3.125; 25.0	1.7	Yes	Yes	No	573190
		Ra<0.4					Yes	573191
1/2	Ra<1.6	Ra<0.8	14.00x2.3; 25.0	2.5	Yes	Yes	No	571792
		Ra<0.4					Yes	571793
3/4	Ra<1.6	Ra<0.8	19.05x1.65; 25.0	7	Yes	Yes	No	571794
		Ra<0.4					Yes	571795
1	Ra<1.6	Ra<0.8	25.4x1.65; 50.5	14	Yes	Yes	No	571796
		Ra<0.4					Yes	571797
1 1/2	Ra<1.6	Ra<0.8	38.1x1.65; 50.5	35	Yes	Yes	No	571798
		Ra<0.4					Yes	571799
2	Ra<1.6	Ra<0.8	50.8x1.65; 64.0	64	Yes	Yes	No	571800
		Ra<0.4					Yes	571801
2 1/2	Ra<1.6	Ra<0.8	63.5x1.65; 77.5	100	Yes	Yes	No	571802
		Ra<0.4					Yes	571803
3	Ra<1.6	Ra<0.8	76.2x1.65; 91.0	150	Yes	Yes	No	571804
		Ra<0.4					Yes	571805

1.) The EHEDG compliance is only valid if used in combination with gaskets from Combit International B.V.

DTS 1000270652 EN Version: Q Status: RL (released | freigegeben | valide) printed: 28.02.2022

Thread process connection acc. to DIN 11851 series A for pipe acc. to DIN 11866 series A (DIN 11850)

Note:

All these versions are equipped with the special functions ATF (acoustic transmission factor) and DF (density factor).

Thread and pipe size	Surface quality		Thread connection dimensions D2 x s; D3 (s = wall thickness)	Maximal flow rate	Certifications		Article no.
	Housing and outer surface of measurement tube	Inner surface of measurement tube			3A (28-06)	EHEDG ^{1.)}	
[mm]	[µm]	[µm]	[mm]	[m ³ /h]			
Electrical connection: 1 x 8 pin M12 male connector, operating voltage of 12...35 V DC							
65	Ra < 1.6	Ra < 0.8	70.0 x 2.0; Rd 95 x 1/6	123	Yes	Yes	574707
80		Ra < 0.8	85.0 x 2.0; Rd 110 x 1/4	185			574708

1.) The EHEDG compliance is only valid if used in combination with EHEDG-compliant gaskets from

- Kieselmann GmbH, Germany (ASEPTO-STAR k-flex upgrade gaskets) or
- Siersema Componenten Service (S.K.S.) B.V. (Netherlands SKS gasket set DIN 11851 EHEDG with EPDM or FKM inner gasket)

Further versions on request	
<p>Process connection</p> <ul style="list-style-type: none"> For pipe DIN 11850: <ul style="list-style-type: none"> – Clamp DIN 32676 – Clamp DIN 11864-3 – Flange DIN 11864-2 For pipe ISO 1127: <ul style="list-style-type: none"> – Clamp DIN 11864-3 – Flange DIN 11864-2 For pipe ASME BPE: <ul style="list-style-type: none"> – Clamp DIN 11864-3 – Flange DIN 11864-2 For pipe SMS 3008: SMS 3017 	<p>Orifice</p> <ul style="list-style-type: none"> • 08...80 mm • 3/8...3 inch <p>Additional</p> <ul style="list-style-type: none"> • Without density factor (DF) • Without acoustic transmission factor (ATF) • ATEX/IECEx <p>Material</p> <ul style="list-style-type: none"> • With inner surface of measurement tube <ul style="list-style-type: none"> – Ra < 0.8 µm (30 µin.) – Ra < 0.4 µm (15 µin.) (electro-polished) according to ISO 4288 <p>Electrical connection</p> <ul style="list-style-type: none"> • 1 x 5 pin M12 male connector • 1 x 8 pin M12 male connector

For any other versions, please use the product enquiry form at the end of this data sheet.

10.7. Ordering chart accessories

Description	Article no.
Display module, Type ME31	265468
Blind cover in stainless steel 304/1.4301	265467
Unlocking magnetic key	690309
System Connect	
Type ME43 Gateway / Interface	
büS/Ethernet (PROFINET, EtherNet/IP, Modbus TCP, EtherCAT)	307390
büS/Profibus DP	307393
Type ME61 Display	
Process View Display 3.5" (8.9 cm)	368544
EDIP Accessories	
büS Stick Set	
USB-büS-Interface Set 1, Type 8923. Detailed information can be found in chapter "9. Product accessories" on page 29.	772426
USB-büS Interface Set 2, Type 8923 (only büS Stick, cable and büS service cable)	772551
Connectors	
5 pin M12 female straight büS cable plug	772416
5 pin M12 male straight büS cable plug	772417
5 pin M12 female angled büS cable plug	772418
5 pin M12 male angled büS cable plug	772419
büS Y-connector, 5 pin M12 female to 5 pin M12 male and 5 pin M12 female	772420
büS Y-connector, 5 pin M12 female to 5 pin M12 male and 5 pin M12 female (power interrupt)	772421
büS adaptor M12 male A-coded - M12 male A-coded	772867
büS termination, 5 pin M12 male cable plug	772424
büS termination, 5 pin M12 female cable plug	772425
Adaptor cable, 8 pin M12 female - 5 pin M12 male	773286
Connectors with cable	
5 pin M12 female angled cable plug moulded on büS cable, with open leads	0,7 m 772626
5 pin M12 female straight cable plug moulded on büS cable, with open leads	1 m 772409
	3 m 772410
	5 m 772411
	10 m 772412
Micro USB and 5 pin M12 male straight cable plug moulded on büS cable	0,3 m 773254
8 pin M12 female straight cable plug moulded on büS cable, with open leads	2 m 919061
Extensions	
5 pin M12 female and male straight cable plug moulded on büS cable, shielded	0,1 m 772492
	0,2 m 772402
	0,5 m 772403
	1 m 772404
	3 m 772405
	5 m 772406
	10 m 772407
20 m 772408	
Type 1573 Power Supplies	
1 A (NEC Class 2 Power Units)	772361
2 A (NEC Class 2 Power Units)	772362
3.8 A (NEC Class 2 Power Units)	772898
10 A	772698

Bürkert – Close to You

For up-to-date addresses
please visit us at
www.burkert.com

DTS 1000270652 EN Version: Q Status: RL (released | freigegeben | validé) printed: 28.02.2022



Product Enquiry Form - FLOWave SAW flowmeter

Thank you for your interest in our products! In order to provide you with optimum advice, please fill out the following form and send it to your **Bürkert representative** or e-mail address: info@burkert.com. All information submitted will of course be kept strictly confidential.

Note: The interactive functions of this PDF may be restricted depending on the PDF reader used.

Personal Information			
Company		Contact person	
Customer no.		Department	
Street		Country / Postcode / Town	
Telephone no.		Email	

Delivery	
Quantity	Required delivery date

Operating data			
Function (Function of the flowmeter in the process / process description)			
Type of medium	Fluid		
Process fluid			
Flow rate (Q)^{1.)}	Min.	Max.	Unit
Temperature	Min.	Max.	Unit
Absolute pressure	Min.	Max.	Unit
Viscosity	Min.	Max.	Unit
Density	Min.	Max.	Unit

1.) Standard unit: Fluid Q = m³/h

Process connection					
Pipe diameter DN	08 40 ¾" 1½"	15 50 ½" 2"	25 65 ¾" 2½"	80 1" 3"	
Connection^{1.)}	Pipe DIN 11850	Clamp DIN 32676 series A		Clamp DIN 11864-3 series A	
		Flange DIN 11864-2 series A			
		Thread DIN 11851 series A			
	Pipe ISO 1127	Clamp DIN 32676 series B		Clamp DIN 11864-3 series B	
		Flange DIN 11864-2 series B			
	Pipe ASME BPE	Clamp DIN 32676 series C		Clamp DIN 11864-3 series C	
		Flange DIN 11864-2 series C			
	Pipe SMS 3008	SMS 3017			

1.) 3A & EHEDG certificate available (see restriction in certificate/certification specification in technical table)

Delete process connection selection

DTS 1000270652 EN Version: Q Status: RL (released | freigegeben | valide) printed: 28.02.2022

Additional configuration			
Surface finish (inner surface)	Ra < 0.8 µm (30 µin.)		Ra < 0.4 µm (15 µin.) electro-polished
FLOWave L Electrical connection	Cable glands and M12 male connector (A-coded), in nickel plated brass (standard version)	Cable glands and M12 male connector (A-coded), in stainless steel (Full stainless steel or ATEX/IECEX version)	M12 female connectors (D-coded) and M12 male connector (A-coded) in stainless steel (Ethernet version)
FLOWave S Electrical connection	5 pin M12 male connector (A-coded) in stainless steel (büS version)		8 pin M12 male connector (A-coded) in stainless steel (version with 2 configurable outputs (DO/AO))
Display module	With		Without
Wi-Fi module (only for EU and north America)	With		Without
Ethernet protocols	Modbus TCP EtherNet/IP	PROFINET EtherCAT®	Without
Special functions	With density factor (DF) With acoustic transmission factor (ATF)		Without density factor (DF) Without acoustic transmission factor (ATF)
Certification	UL listed 1 + CULus	ATEX/IECEX	Without

Note:

If a certification which is not included in delivery with the FLOWave is requested, please order it separately. If you want to order one or more later, please contact your Bürkert office.

Certification
FDA certificate (included in delivery)
Inspection certificate 3.1 acc. to EN 10204 (included in delivery)
Certification of compliance ASME BPE (included in delivery)
Calibration certificate (included in delivery)
EHEDG - TYPE EL-CLASS I ¹⁾ (included in delivery)
3A, 28-06 (included in delivery)
USP class VI declaration
ECR1935/2004 declaration
CRN 0C21751 declaration
Test report 2.2 acc. to EN 10204 (article no. 803722)
Certification of conformity for the surface quality DIN 4762; EN ISO 4287; EN ISO 4288 (article no. 804175)
Certification of conformity for passivation and electropolishing processes (article no. 444900)
MTBF (Mean Time Between Failures) manufacturer declaration

1.) The EHEDG compliance is only valid if used in combination with gaskets from Combitit International B.V, Kieselmann GmbH, Germany or Siersema Komponenten Service (S.K.S.) B.V. according to the device version.

Additional Requirements / Comment

DTS 1000270652 EN Version: Q Status: RL (released | freigegeben | valide) printed: 28.02.2022